



APX radio accessories

Resilience without compromise



Table of contents

APX N Portable radio accessories	5	Hearing protection and tactical solutions	46
APX N70 XE featured accessories	6	Motorola Impres 2 batteries	49
Remote speaker microphones (RSM)	7	Motorola Impres batteries	52
RSM replacement parts	10	Charger Solutions	53
SVX Video remote speaker microphone	11	Battery Fleet Management	55
WM800 Remote speaker microphone	13	Carry Solutions	56
Surveillance accessories and earpieces	14	Antennas	62
Surveillance accessories replacement kits	14	Programming cables	64
RSM Secondary audio accessories	14	APX mobile radio accessories	65
Earpieces	14	Long range wireless remote speaker microphones	66
Headsets and 3M Peltor headsets	16	Long range wireless RSM accessories and replacement parts	67
Motorola Impres 2 batteries	17	Microphones	69
Charger solutions	19	Control station and mobile microphone accessories	69
Carry solutions	21	Installation and mounting accessories	70
Antennas	24	External alarm accessories	70
Antennas and cables	25	Universal relay controller	70
APX portable radio accessories	26	Speakers	71
XVE500 RSM button configuration	27	Siren accessories	71
Remote Speaker Microphones	28	Cables	72
RSM accessories and replacement parts	29	Antennas	74
XVP remote speaker microphones	30	Glossary	81
XVP RSM accessories and replacement parts	31		
Public safety microphones	33		
Mission Critical Wireless (MCW) RSM	35		
MCW RSM accessories and placement parts	35		
Operations critical wireless (OWC) accessories	38		
Commport™	40		
Ear microphone system	41		
Surveillance kits	42		
Surveillance kit accessories and replacement parts	43		
Headsets	46		





Mission critical performance focused on durability and flexibility to keep you safer

Motorola P25 APX radios deliver what first responders need to increase their safety and improve their situational awareness. Get the most out of your APX radio by extending its power and reliability with resilient APX accessories. They are the only accessories tested and certified for use with APX radios. Our accessories endure rigorous testing to last longer and help keep you safer. There's simply no substitute for Motorola APX accessories.

Motorola's exclusive energy and audio features are made for mission critical moments

**IMPRES™ 2 Energy: Your radio is your lifeline.
If your battery dies, it jeopardizes everything.**

That's why we introduced the IMPRES 2 for APX series radios. It's a next-generation energy system that's safer and smarter, while keeping you powered for even longer. With IMPRES 2 chargers, you can charge batteries up to 40% faster. Customize your charging to extend the life of batteries in storage. And manage power more intelligently with enhanced diagnostics, so you get the most from each battery.

**IMPRES Audio: I hear you, even when
you can't hear yourself.**

Motorola's exclusive IMPRES audio accessories help suppress ambient noise, amplify loudness and improve voice intelligibility. IMPRES audio can virtually block out all background noise in any extreme environment with windproofing and noise-cancelling technology. Ensure your voice is heard loud and clear no matter what direction you speak with an advanced microphone system. IMPRES audio will make sure you are heard in any demanding environment.





APX NEXT XN



APX NEXT XE



APX NEXT



APX N70 XE



APX N70



APX N50



APX N30



APX N70 XE featured accessories

See more compatible accessories throughout the catalog

COMPATIBILITY		ACCESSORY		
APX N70 XE FEATURED ACCESSORIES				
Radio	DESCRIPTION	CATEGORY	PART NUMBER	CARRY ATTACHMENT
	 XVE500m high impact green, channel knob, GCAI mini	RSM	PMMN4173	
	 XVE500m black channel knob, GCAI mini	RSM	PMMN4173_BLK	
	 XVE500m high impact green, no channel knob, GCAI mini	RSM	PMMN4172	
	 XVE500m black no channel knob, GCAI mini	RSM	PMMN4172_BLK	
	 1-wire Surveillance Kit, Loud Audio, Translucent Tube	Earpiece	PMLN8716	
	 2-wire Surveillance Kit, Loud Audio, Translucent Tube	Earpiece	PMLN8717	
	 3-wire Surveillance Kit, Loud Audio, Translucent Tube	Earpiece	PMLN8718	
	 2-wire Swivel Earhook with Removable Eartip, Loud Audio, Black	Earpiece	PMLN8714	
	 1 Wire Single Earbud with Removable Earhook, Loud Audio, Black	Earpiece	PMLN8713	
	 APX N70 XE Classic Holster (Compatible with PMNN4816,PMNN4817,PMNN4818)	Carry	PMLN8689 Carry attachment buy separately	2.5" - PMLN8507 3" - PMLN8508 AY000223A01 AY000229A01 RLN6487 RLN6488 RLN6486
APX N70 XE	 APX N70 XE Leather Case (use with PMNN4818 only)	Carry	PMLN8690 Carry attachment buy separately	AY000223A01 AY000229A01 RLN6487 RLN6488 RLN6486
	 IMPRES 2 Li-Ion 3200 mAh Battery, IP68 Rugged*	Battery	PMNN4816	
	 IMPRES 2 Li-Ion 4400 mAh Battery, IP68 Rugged*	Battery	PMNN4817	
	 IMPRES 2 Li-Ion 3650 mAh Battery, IP68 Rugged*	Battery	PMNN4818	
	 IMPRES 2 Single-Unit Fast Charger, US/NA 115V	Charger (SUC)	PMPN4604	
	 IMPRES 2 Multi-Unit Fast Charger with 6 Displays and 6 Integrated USB Charging Ports, US/NA, 100-240V	Charger (MUC)	PMPN4591	
	 Whip Antenna, 762-870 mHz, 15cm, Ferrule	Antenna	AN000411A01	
	Stubby Antenna, 762-870 mHz, 10cm, Ferrule	Antenna	AN000418A01	



* APX N70, N70 XE, N50, N30 & APX NEXT XN batteries come with self-calibration feature when used with IMPRES 2 Single-Unit Fast Charger (SW ver V2.05 and above) and IMPRES 2 Multi-Unit Fast Charger (SW ver V2.05 and above).

XVN500 Remote speaker microphone

Audio for extreme environments

The XVN500 features four high dynamic range (HDR) microphones, which are arranged for all-round coverage. This guarantees that communications are clear from every direction. The designated HDR mic arrangement also provides significant muffled audio reductions from any positions that the RSM may be held or worn.

To further enhance noise suppression, all HDR microphones are not only windported but are also placed behind our exclusively engineered housing. This further redirects airflow and facilitates water draining, effectively mitigating any leftover wind noise. The adaptive noise suppression also allows for voice tracking while filtering out surrounding background noise, giving you the best clarity in your communications.

The XVN500's HDR microphone technology prevents speech distortion, even when shouting in extreme noise environments. And as the noise environment changes, so will the XVN500 to adjust for maximum noise cancellation. When combined with the APX NEXT XN, this technology will give firefighters high quality audio features for any intense situation.

Loud and intelligible

The XVN500 RSM speaker improves speaker clarity while the maintaining best in class volumes. Even at the highest volume, the RSM will maintain understandable and intelligible audio output. This audio cuts through the noisiest environments while simultaneously preserving audio richness at mid to low volumes.

The XVN500 audio experience is enhanced by using the full features of the adaptive audio engine on the APX NEXT XN. This dynamically optimizes the radio's performance in the presence of background noise. Adaptive microphones gain control while adaptive speaker equalization provides the loudest, most intelligible audio in any environment, even at maximum volume.

The algorithm in the XVN500 RSM allows additional audio features like Receive Volume Leveling to be maximized through the RSM. With receive volume leveling, a firefighter can set the volume once, and the radio will adjust based on the power of the received audio of loud or soft voices.

XVN500 RSM button configuration



APX portable radio RSMs

COMPATIBILITY	ACCESSORY		FEATURES											
REMOTE SPEAKER MICROPHONES (RSM)														
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VIQI SUPPORT	VOLUME CONTROL	ORANGE BUTTON	CHANNEL CONTROL	AUDIO JACK	PROGRAM-MABLE BUTTON	IP RATING	HAZLOC-CAPABLE†	SIZE (WITHOUT CLIP) (MM)	
APX NEXT XN	 XVN500 high impact green, no channel knob, Xtreme temperature cable (meets latest fire standard)	PMMN4138	•	•	•	•	•			2	IP68	UL	75 x 98 x 34	
	 XVN500 high impact green, with channel knob, Xtreme temperature cable (meets latest fire standard)	PMMN4162	•	•	•	•	•	•		2	IP68	UL	75 x 98 x 34	
APX NEXT XE APX NEXT	 XVE500 high impact green, channel knob, Xtreme Temperature Cable	PMMN4154_T	•	•	•	•	•	•		2	IP68	UL	75 x 98 x 34	
	 XVE500 black housing, channel knob, Xtreme temperature cable	PMMN4154_TBLK	•	•	•	•	•	•		2	IP68	UL	75 x 98 x 34	
	 XVE500 High impact green, no channel knob, Xtreme temperature cable	PMMN4152_T	•	•	•	•	•			2	IP68	UL	75 x 98 x 34	
	 XVE500 black housing, no channel knob, Xtreme temperature cable	PMMN4152_TBLK	•	•	•	•	•			2	IP68	UL	75 x 98 x 34	
	 XVP850 RSM with channel knob TAA compliant	PMMN4135_TAA**	•	•	•	•	•	•	•	3	IP68	UL	58 x 93 x 31	
	 XVP830 RSM without channel knob TAA compliant	PMMN4136_TAA**	•	•	•	•	•		•	3	IP68	UL	58 x 93 x 31	
	 XVP850 RSM with channel knob	PMMN4135	•	•	•	•	•	•	•	3	IP68	UL	58 x 93 x 31	
	 XVP850 RSM without channel knob	PMMN4136	•	•	•	•	•		•	3	IP68	UL	58 x 93 x 31	
APX N70 XE APX N70 APX N50*	 XVE500m high impact green, channel knob, Xtreme Temperature Cable	PMMN4173	•	•	•	•	•	•		2	IP68	UL	75 x 98 x 34	
	 XVE500m black housing, channel knob, Xtreme temperature cable	PMMN4173_BLK	•	•	•	•	•	•		2	IP68	UL	75 x 98 x 34	
	 XVE500 High impact green, no channel knob, Xtreme temperature cable	PMMN4172	•	•	•	•	•			2	IP68	UL	75 x 98 x 34	
	 XVE500 black housing, no channel knob, Xtreme temperature cable	PMMN4172_BLK	•	•	•	•	•			2	IP68	UL	75 x 98 x 34	
APX N70 XE APX N70 APX N50 APX N30		RM780 RSM	PMMN4128	•	Windporting mic	•	•		•	2	IP68	UL	77 x 58 x 25	
		RM780 RSM	PMMN4177	•	Windporting Mic	•	•		•	2	IP68	UL	77 x 58 x 25	



† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

* Compatible with APX N50 when the "Audio Bundle" is selected

** TAA: Trade Agreements Act, relevant to U.S. Federal Government business

APX N portable radio RSMs

COMPATIBILITY			ACCESSORY			FEATURES								
REMOTE SPEAKER MICROPHONES (RSM)														
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VIQI SUPPORT	VOLUME CONTROL	ORANGE BUTTON	CHANNEL CONTROL	AUDIO JACK	PROGRAM- MABLE BUTTON	IP RATING	HAZLOC- CAPABLE†	SIZE (WITHOUT CLIP) (MM)
Portable Radios: APX NEXT APX NEXTi APX N70 APX N70 XE APX N50 APX N30 APX8000 APX6000 BN APX900 APX6000XE APX8000XE APX8000H APX8000HXE SRX 2200 Mobile Radios: APX8500 APX6500 BN APX5500 BN APX4500 BN APX2500 BN APX1500 BN		WM800 wireless RSM	PMMN4158	•	•	•	•	•		•	3	IP68	UL	67.5 x 98 x 32
		SVX Video Remote Speaker Microphone	PMMN8200		•	•	•	•		•	3	IP68	UL	61.1 x 109.3 36.4
APX N70 XE APX N70 APX N50*		XVP750 RSM with channel knob	PMMN4141_TA A	•	•	•	•	•	•	•	3	IP68	UL	58 x 93 x 31
		XVP730 RSM without channel knob	PMMN4142_TA A	•	•	•	•	•		•	3	IP68	UL	58 x 93 x 31
		XVP750 RSM with channel knob	PMMN4141	•	•	•	•	•	•	•	3	IP68	UL	58 x 93 x 31
		XVP730 RSM without channel knob	PMMN4142	•	•	•	•	•		•	3	IP68	UL	58 x 93 x 31
APX N70 XE APX N70 APX N50 APX N30		RM780 RSM	PMMN4128	•	Windporting mic		•	•		•	2	IP68	UL	77 x 58 x 25
		RM780 RSM	PMMN4177	•	Windporting mic		•	•		•	2	IP68	UL	77 x 58 x 25



[†] HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

* Compatible with APX N50 when the "Audio Bundle" is selected

APX N portable radio RSM accessories

COMPATIBILITY		ACCESSORY	
Remote speaker microphone accessories and replacement parts			
RSM's	DESCRIPTION		PART NUMBER
RSM REPLACEMENT PARTS			
XVN500		Xtreme temperature replacement cable for XVN500 RSM	CB001073A01
		XVN500 RSM clip assembly with brass insert designed to work with the boston leather straps (AY000223A01, AY000229A01) requires clip button NNTN8749	PMLN9005
XVE500 XVE500m		Xtreme temperature replacement cable for XVE500 RSM (GCAI)	CB001138A01
		Xtreme temperature replacement cable for XVE500m RSM (GCAI mini)	CB001289A01
		XVE500 RSM clip assembly with brass insert designed to work with the boston leather straps (AY000223A01, AY000229A01) requires clip button NNTN8749	PMLN7633
XVN500 XVE500 XVE500m		Replacement channel knob (20pcs per pack)	PMLN7653
		Clip button (5pcs per pack)	NNTN8749
XVP850 XVP830		Replacement coil cord	PMKN4260
WM800 XVP850 XVP830 XVP750 XVP730		Low profile swivel clip with D-ring (10pcs per pack)	PMLN8312
		Swivel molle clip (1pc)	PMLN8675
XVP850 XVP750		Replacement channel knob (20pcs per pack)	PMLN8313
XVP750 XVP730		Replacement coil cord	PMKN4461
RM780		Replacement cable for RM780	PMKN4462
		Replacement dust cover for RM780 (10pcs per pack)	PMLN8122
		Replacement low profile swivel clip	PMLN8121



SVX Video remote speaker microphone

Voice and video, combined without compromise

By converging our industry-leading APX NEXT and N70 radio line and our trusted body camera technology, we've transformed what it means to be on the front line. Now, your team can get the best of both worlds, by accessing mission-critical communications, evidential video capture and public safety-grade AI from one device, without sacrificing ergonomics or usability.

But we didn't stop there. We know that, even though technology should be a force multiplier for modern law enforcement agencies, it often just serves to create more stress - whether it's an issue of equipment management, training or budget. The SVX solution goes beyond just converging hardware: it also revolutionizes the workflows around device deployment, usage and even evidence handling: so now, your team can get twice the results from half the resources.

APX, amplified and more intelligent

Clear audio is a crucial element of effective law enforcement, from talking to your team throughout a high-stakes situation, to capturing confessions and witness statements on the go. Like the rest of our RSM portfolio, the SVX is designed with audio quality top of mind: two high dynamic range (HDR) microphones, sophisticated windporting and intelligent noise reduction technology ensure that officers will be heard, even in the most demanding conditions.

This clear audio means that ViQi will hear you better than ever before, and it's also the gateway to a better response downstream: leveraging the SVX's voice technology, our Assist AI can generate more reliable incident creation prompts for dispatchers, and provide more accurate license plate searches for intelligence analysts.

SVX VRSM overview



SVX accessories

COMPATIBILITY		ACCESSORY	
SVX Video Remote Speaker Microphone Accessories			
RSM	DESCRIPTION	CATEGORIES	PART NUMBER
 			



APX portable radio WM800 accessories

COMPATIBILITY	ACCESSORY		FEATURES									
WM800 WIRELESS REMOTE SPEAKER MICROPHONE												
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VIQI SUPPORT	VOLUME CONTROL	PROGRAM-MABLE BUTTON	ORANGE BUTTON	AUDIO JACK	IP RATING	HAZLOC-CAPABLE†	SIZE (WITHOUT CLIP) (MM)
Portable Radios: APX NEXT APX NEXTi APX N70 APX N50 APX N30 APX8000 APX6000 BN APX900 APX6000XE APX8000XE APX8000H APX8000HXE SRX 2200 Mobile Radios: APX8500 APX6500 BN APX5500 BN APX4500 BN APX2500 BN APX1500 BN Not Supported with Standard APX radios in analog channel	 WM800 wireless RSM (with battery and USB charging cable)	PMMN4158	•	•	•	•	3	•	•	IP68	UL	67.5 x 98 x 32

COMPATIBILITY	ACCESSORY		
WM800 ACCESSORIES AND REPLACEMENT PARTS			
ACCESSORY	DESCRIPTION	CATEGORIES	PART NUMBER
WM800	 Li-Ion 2150 mAh battery, IP68 rugged (with swivel clip)	Battery	PMNN4846
	 WM800 dual unit charger with US Plug	Charging solution	PMPN4653
	 Power Supply (US) for WM800 dual unit charger		PS000277A11
	 USB-C charging cable		PMKN4294
	 Low profile swivel clip with D-ring (10pcs per pack)	Carry attachments	PMLN8312
	 Coiled lanyard (5pcs per pack)		PMLN8682
	 Swivel molle clip for remote speaker microphone		PMLN8675
	 N-ear 360 Flexo Dynamic™ Braided Fiber Cloth™ earpiece	Earpieces	PMLN8650
	 Receive-only earpiece with coiled translucent tube, loud audio		PMLN8652



APX N portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES					
SURVEILLANCE ACCESSORIES AND EARPIECES								
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	EARPIECE TYPE	MICROPHONE	PTT	PROGRAMMABLE BUTTON	HAZLOC-CAPABLE†
APX N70 APX N50 APX N30	 IMPRES™ 1-Wire Surveillance Kit with Translucent Tube, Loud Audio, Black	PMLN8341	•	Clear Rubber Eartip	•	•		UL
	 IMPRES™ 2-Wire Surveillance Kit with Translucent Tube, Loud Audio, Black	PMLN8342	•	Clear Rubber Eartip	•	•	•	UL
	 IMPRES™ 3-Wire Surveillance Kit with Translucent Tube, Loud Audio, Black	PMLN8343	•	Clear Rubber Eartip	•	•	•	UL
	 IMPRES™ 2-Wire Swivel Earhook with Removable Eartip, Loud Audio, Black	PMLN8295	•	Removable Black Rubber Eartip	•	•	•	UL
	 IMPRES™ 1-Wire Single Earbud with Removable Earhook, Loud Audio, Black	PMLN8337	•	Single Earbud	•	•		

COMPATIBILITY	ACCESSORY	
SURVEILLANCE ACCESSORIES REPLACEMENT KITS		
ACCESSORY	DESCRIPTION	PART NUMBER
PMLN8120 PMLN8341 PMLN8342 PMLN8343 PMLN8716 PMLN8717 PMLN8718	 Replacement Quick Disconnect Translucent Tube with Clear Rubber Eartip	PMLN8092
PMLN8714	 Replacement Rubber Eartip, Small (5 per pack)	PMLN8068
	 Replacement Rubber Eartip, Medium (5 per pack)	PMLN8069
	 Replacement Rubber Eartip, Large (5 per pack)	PMLN8070
PMLN8713	 Replacement Rubber Sleeve, Small (25 per pack)	PMLN8363
	 Replacement Rubber Sleeve, Medium (25 per pack)	PMLN8364
	 Replacement Rubber Sleeve, Large (25 per pack)	PMLN8365

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX N portable radio audio accessories

COMPATIBILITY	ACCESSORY	FEATURES		
REMOTE SPEAKER MICROPHONE SECONDARY AUDIO ACCESSORIES				
RSMS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	CONNECTOR TYPE
WM800 XVP850 XVP830 XVP750 XVP730	 N-ear 360 Flexo Dynamic™ Braided Fiber Cloth™ earpiece	PMLN8650	Clear rubber eartip	3.5mm
	 Receive-only earpiece with coiled translucent tube, loud audio	PMLN8652	Clear rubber eartip	3.5mm
RM780	 Receive-only earpiece with Loud Audio Translucent Tube	PMLN8120	Clear rubber eartip	3.5mm

COMPATIBILITY	ACCESSORY		FEATURES					
EARPIECES								
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	EARPIECE TYPE	MICROPHONE	PTT	PROGRAMMABLE BUTTON	HAZLOC-CAPABLE
APX NEXT XE APX NEXT	 IMPRES 2-Wire surveillance kit, programmable button, black	PMLN6127	•	Ear hanger	Mic and PTT combined on a single wire		•	UL
	 IMPRES 2-wire surveillance kit with translucent tube, programmable button, black	PMLN6129	•	Clear rubber eartip	Mic and PTT combined on a single wire		•	UL
	 IMPRES 2-Wire surveillance kit with translucent tube, programmable button, beige	PMLN6130	•	Clear rubber eartip	Mic and PTT combined on a single wire		•	UL
	 3.5mm threaded audio adapter	BDN6783		Not applicable	Not applicable	Not applicable	Not applicable	
	 2-wire surveillance kit with translucent tube, black, 3.5mm threaded. requires BDN6783.	RLN5312		Clear rubber eartip	Mic and PTT combined on a single wire		Not applicable	



† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX N portable radio audio accessories

COMPATIBILITY		ACCESSORY		FEATURES									
HEADSETS													
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	HEADSET TYPE	EARPIECE STYLE	IMPRES	INTELLIGENT AUDIO	NOISE REDUCTION RATING	MICROPHONE	PTT	WEIGHT	IP RATING	HAZLOC-CAPABLE†
APX N70 XE APX N70 APX N50 APX N30		Heavy duty behind-the-head headset with noise-canceling boom microphone (see user guide for replacement parts)	PMLN8085	Behind-the-head	Dual-muff	●	●	24 dB	Boom	On ear cup	Heavy duty	IP54	UL
		Heavy duty over-the-head headset with noise-canceling boom microphone (see user guide for replacement parts)	PMLN8086	Over-the-head	Dual-muff	●	●	24 dB	Boom	On ear cup	Heavy duty	IP54	UL

COMPATIBILITY		ACCESSORY		FEATURES						
3M PELTOR HEADSETS The 3M Peltor CH-3 Series is designed for industrial users working in high noise environments.										
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	HEADSET TYPE	CONNECTOR TYPE	SPEAKER	NOISE REDUCTION RATING (NRR)	MICROPHONE	PTT (MOTOTRBO)	HAZLOC-CAPABLE†
PTT ADAPTER CONFIGURATIONS										
APX N70 XE APX N70 APX N50 APX N30		CH-3 Series Over-the-Head Headset with Nexus Connector (See user guide for replacement parts)	PMLN8265	Over-the-Head	Nexus	Dual-Ear	26 dB	Boom	Requires PTT Adapter PMLN8297	
		CH-3 Series Neckband Headset with Nexus Connector (See user guide for replacement parts)	PMLN8266	Neckband	Nexus	Dual-Ear	24 dB	Boom	Requires PTT Adapter PMLN8297	
		CH-3 Series Hard Hat Attached with Nexus Connector (Hat not included) (See user guide for replacement parts)	PMLN8267	Hard Hat Attached	Nexus	Dual-Ear	24 dB	Boom	Requires PTT Adapter PMLN8297	
		PTT Nexus Adapter (Requires headset - options listed above)	PMLN8297	N/A	N/A	N/A	N/A	N/A	N/A	


† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

APX N portable radio energy accessories

COMPATIBILITY	ACCESSORY			FEATURES							
MOTOROLA IMPRES 2 BATTERIES WITH SELF CALIBRATION											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES 2	CHEMISTRY	TYPICAL CAPACITY (MAH)	DIMENSIONS (MILLIMETERS) (H X W X D)	WEIGHT (MAX.GRAMS)	HAZLOC-CAPABLE†	IP RATING	OPERATING TEMPERATURE (DISCHARGE)
APX NEXT XN		IMPRES 2 Li-Ion 3400 mAh battery, IP68 rugged*	PMNN4812	●	Li-Ion	3400	117 x 64 x 42	280	UL	IP68 rugged	-20°C to +60°C
APX N70 XE APX N70		IMPRES 2 Li-Ion 3200 mAh battery, IP68 rugged*	PMNN4816	●	Li-Ion	3200	78 x 49 x 23	145		IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 4400 mAh battery, IP68 rugged*	PMNN4817	●	Li-Ion	4400	83 x 49 x 27	200		IP68 rugged	-30°C to +60°C
		IMPRES 2 Li-Ion 3650 mAh battery, IP68 rugged*	PMNN4818	●	Li-Ion	3650	95 x 49 x 27	260	UL	IP68 rugged	-30°C to +60°C
APX N50 APX N30		IMPRES 2 Li-Ion 2850 mAh battery, IP68 rugged*	PMNN4813	●	Li-Ion	2850	117 x 49 x 15	115		IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 3200 mAh battery, IP68 rugged*	PMNN4815	●	Li-Ion	3200	116 x 48 x 23	165	UL	IP68 rugged	-20°C to +60°C

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

* APX N70, N50, N30 & APX NEXT XN batteries come with self-calibration feature when used with IMPRES 2 Single-Unit Fast Charger (SW ver V2.05 and above) and IMPRES 2 Multi-Unit Fast Charger (SW ver V2.05 and above).

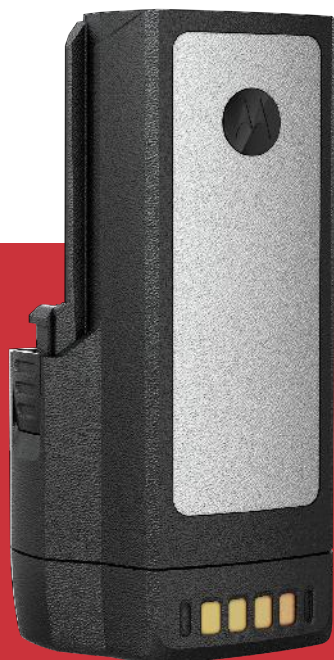

APX Next XN battery



What is self-calibration?

Selected IMPRES 2 batteries are equipped with the self calibration feature and can be identified through this logo on the battery label. These batteries do not require long hours of calibration or reconditioning process, when charged with:

- IMPRES 2 Single Unit Fast Charger (SW ver V2.05* and above)
- IMPRES 2 Multi Unit Fast Charger (SW ver V2.05* and above)



APX N portable radio energy accessories

COMPATIBILITY	ACCESSORY		FEATURES								
MOTOROLA IMPRES 2 BATTERIES											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES 2	CHEMISTRY	TYPICAL CAPACITY (MAH)	DIMENSIONS (MILLIMETERS) (H X W X D)	WEIGHT (MAX. GRAMS)	HAZLOC-CAPABLE†	IP RATING	OPERATING TEMPERATURE (DISCHARGE)
APX NEXT XE APX NEXT		IMPRES 2 Li-Ion 4400 mAh Battery, IP68 rugged	NNTN9217	●	Li-Ion	4400	82 x 64 x 42	195	UL	IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 5550 mAh Battery, IP68 rugged	PMNN4896	●	Li-Ion	5550	96 x 64 x 42	258	UL	IP68 rugged	-20°C to +60°C
APX NEXT		IMPRES 2 Li-Ion 4400 mAh Battery, IP68 rugged	NNTN9216	●	Li-Ion	4400	82 x 64 x 42	195		IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 5550 mAh Battery, IP68 rugged	PMNN4895	●	Li-Ion	5550	96 x 64 x 42	258		IP68 rugged	-20°C to +60°C

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

*Motorola Solutions recommends a calibration procedure be performed on an IMPRES 2 battery every 28 days to maintain best APX device fuel gauge accuracy and prevent missing battery icon.

For IMPRES 2 battery care tips, please visit:

<http://motorolasolutions.com/batterycare>

Key features

- Built with highest energy density cells yet
- Backed by a 24-month capacity warranty²
- 48 month workmanship warranty

¹ 24 month capacity warranty applicable only when battery is maintained with IMPRES 2 chargers

² IP68 Rugged: APX NEXT radio with battery attached submerged in 2 meters of water for 4 hours



Standard capacity



High capacity



APX N portable radio charger accessories

COMPATIBILITY			ACCESSORY		FEATURES						
CHARGER SOLUTIONS Choose from a variety of solutions including single-unit, unique dual-unit, multi-unit, travel and vehicular chargers and be confident your radio is charged and ready to go the moment you need it.											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	CHEMISTRY	POWER SOURCE	DIMENSIONS (MILLIMETERS) (H X W X D)	NUMBER OF POCKETS	RECONDITIONING CAPABLE	CHARGING CURRENT (MAX.)	NUMBER OF DISPLAYS
SINGLE AND MULTI-UNIT CHARGERS											
APX NEXT XN APX NEXT XE APX NEXT APX N70 APX N70 XE		IMPRES 2 Single-Unit Fast Charger, US/NA 115V	PMPN4604 PMPN4604ATAA	•	Li-Ion	115VAC	75 x 100 x 125	1	•	Fast	
		IMPRES 2 Multi-Unit Fast Charger with 6 Displays and 6 Integrated USB Charging Ports, US/NA 100-240V	PMPN4591 PMPN4591BTAA	•	Li-Ion	100-240VAC	197 x 445 x 262	6	•	Fast	6
		Pocket to use with IMPRES 2 Multi-Unit Fast Charger	AS000178A02	Software upgrade is required if used with NNTN8844, NNTN9115. Reference the charger user manual to learn how to identify the charger SW version and perform update.							
		Wall Mount Bracket for IMPRES 2 Multi-Unit Chargers	NLN7967								
APX N50 APX N30		IMPRES 2 Single-Unit Charger, US/NA 115V	PMPN4820 PMPN4821 - EU, 240V PMPN4822 - UK/HK, 240V PMPN4823A - ANZ, 240V PMPN4824A - ARG, 240V PMPN4828 - IND, 100-240V PMPN4827 - BRZ, 100-240V	•	Li-Ion, NiMH	115VAC	51 x 88 x 94	1	•	Rapid Rate	
		IMPRES 2 Multi-Unit Charger, US/NA 100-240V	PMPN4594 PMPN4595 - EU 100-240V PMPN4596 - UK/HK 100-240V PMPN4597 - ANZ 100-240V PMPN4598 - ARG 100-240V PMPN4646 - IND 100-240V PMPN4600 - BRZ 100-240V	•	Li-Ion, NiMH	100-240VAC	117 x 444 x 170	6	•	Rapid Rate	1
		Pocket to use with IMPRES 2 Multi-Unit Charger	AS000130A01	Software upgrade is required if used with PMPN4284. Reference the charger user manual to learn how to identify the charger SW version and perform update.							
		Wall mount bracket for PMPN4594 Charger	BR000272A01								
APX NEXT XN APX NEXT XE APX NEXT		IMPRES 2 Single-Unit Fast Charger, US/NA 115V	NNTN9199	•	Li-Ion	115VAC	75 x 100 x 125	1	•	Fast	
		MPRES 2 Single-Unit Fast Charger, ANZ 100-240V	NNTN9259	•	Li-Ion	100-240VAC	75 x 100 x 125	1	•	Fast	
		IMPRES 2 Single-Unit Fast Charger, BRZ 100-240V	NNTN9204	•	Li-Ion	100-240VAC	75 x 100 x 125	1	•	Fast	
APX NEXT XN APX NEXT XE APX NEXT		IMPRES 2 Multi-Unit Fast Charger, US/NA 100-240V	NNTN9115	•	Li-Ion	100-240VAC	197 x 445 x 262	6	•	Fast	6
		IMPRES 2 Multi-Unit Fast Charger, ANZ 100-240V	NNTN9113	•	Li-Ion	100-240VAC	197 x 445 x 262	6	•	Fast	6
		IMPRES 2 Multi-Unit Fast Charger, BRZ 100-240V	NNTN9114	•	Li-Ion	100-240VAC	197 x 445 x 262	6	•	Fast	6
APX NEXT XN APX NEXT XE APX NEXT		Pocket to use with IMPRES 2 Multi-Unit Fast Charger	NNTN9212								
		Wall Mount Bracket for IMPRES 2 Multi-Unit Chargers	NLN7967								



Charger Software version should be upgraded to v2.05 and above. Chargers can be updated to the latest software version using the MSI Charger Reprogrammer Installation Software. An installation guide is included in the software download package. https://www.motorolasolutions.com/en_us/products/two-way-radio-accessories/batteries/impres.html

*Fast = up to 3.0A Rapid Rate = up to 1.5A

APX N portable radio charger accessories

COMPATIBILITY		ACCESSORY		FEATURES						
CHARGER SOLUTIONS Choose from a variety of solutions including single-unit, unique dual-unit, multi-unit, travel and vehicular chargers and be confident your radio is charged and ready to go the moment you need it.										
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	CHEMISTRY	POWER SOURCE	DIMENSIONS (MILLIMETERS) (H X W X D)	NUMBER OF POCKETS	CHARGING CURRENT (MAX.)	NUMBER OF DISPLAYS	COMPATIBLE BATTERIES
VEHICLE TRAVEL CHARGERS										
APX NEXT XN APX NEXT XE APX NEXT APX N70 APX N70 XE	 APX NEXT Vehicle Charger	PMPN4639	•	Li-Ion	12VDC Hardwire	82 x 97 x 200	1	Fast		
APX NEXT XN APX NEXT XE APX NEXT	 APX NEXT Travel Charger with CLA cable and mounting bracket	PMPN4688	•	Li-Ion	12-24V		1			
APX N50 APX N30	 APX N30/N50 Vehicle Charger	PMPN5042A	•	Li-Ion	12VDC Hardwire	96 x 96 x 143	1			PMNN4813 PMNN4815

COMPATIBILITY	ACCESSORY	
VEHICLE TRAVEL CHARGER ACCESSORIES AND REPLACEMENT PARTS		
TRAVEL CHARGERS	DESCRIPTION	PART NUMBER
PMPN4688	 Magnetic mounting bracket for APX NEXT Travel Charger	PMLN8791A
	 RAM mount for APX NEXT Travel Charger	HW003366A01
	 DC cable for APX NEXT Travel Charger	CB001305A01
	 CLA cable for APX NEXT Travel Charger	CB001316A01
PMPN5042A	Spare battery adapter for APX N30/N50 Vehicle Charger	PMPN5041A



Charger Software version should be upgraded to v2.05 and above. Chargers can be updated to the latest software version using the MSI Charger Reprogrammer Installation Software. An installation guide is included in the software download package. https://www.motorolasolutions.com/en_us/products/two-way-radio-accessories/batteries/impres.html

*Fast = up to 3.0A Rapid Rate = up to 1.5A

APX N portable radio charger accessories

COMPATIBILITY	ACCESSORY		FEATURES	
CHARGER SOLUTIONS REPLACEMENT PARTS				
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	POWER SOURCE	DIMENSIONS (MILLIMETERS) (H X W X D)
REPLACEMENT POWER SUPPLY AND POWER CORDS				
APX NEXT XN APX NEXT XE APX NEXT		Replacement power supply unit for IMPRES 2 single-unit fast charger, US/NA 115V	PS000040A01	115 VAC
		Replacement power supply unit for IMPRES 2 single-unit fast charger, 100-240 VAC without power cord	PS000116A01	100-240 VAC
		Power cord for IMPRES 2 multi-unit charger, US/CAN plug	3087791G01	2300
		Power cord for IMPRES 2 multi-unit charger, AU/NZ plug	3087791G10	2300
		Power cord for IMPRES 2 multi-unit charger, BZL plug	3087791G22	2300
APX NEXT XN APX NEXT XE APX NEXT APX N70		Replacement power supply unit for IMPRES 2 single-unit fast charger, US/NA 115V	PS000040A02	115 VAC
APX N50 APX N30		Replacement power supply unit for IMPRES 2 single-unit charger, US/NA 115V	25009297002	115 VAC
		Replacement power supply unit for IMPRES 2 Multi-Unit Charger, 100-240 VAC without power cord	PS000242A01	100-240 VAC
APX NEXT XN APX NEXT XE APX NEXT APX N70 XE APX N70		Replacement APX vehicle charger battery adapter	PMPN4649	(To be used with APX NEXT vehicle charger, PMPN4639)

IMPRES 2 multi-unit charger

Charge up to six APX NEXT XN, APX NEXT XE, APX NEXT, APX N70, APX N50 and APX N30 radios or batteries simultaneously for more efficiency.

- IMPRES 2 charging algorithms increase charge cycles up to 60% over non-IMPRES
- Provides up to 3A per pocket for faster charging
- Disable calibration mode or enable long term storage mode
- Optional wall mount kit NLN7967
- California Energy Commission (CEC) energy efficiency compliant



APX N portable radio carry accessories

COMPATIBILITY		CARRY SOLUTION		FEATURES					
CARRY SOLUTIONS Carry cases and holders are available in sizes designed to fit your radio and battery and permit audio to be heard clearly. Our carry accessories keep your hands-free, so you can concentrate on the task at hand.									
PORTABLE RADIOS		DESCRIPTION		PART NUMBER	MATERIAL	D-RINGS	ATTACHMENTS/REPLACEMENT KIT (SOLD SEPERATELY)		USE WITH BATTERIES
APX NEXT XN		APX NEXT XN Boston Leather Carry Case		PMLN8328	Leather	●	AY000223A01 AY000229A01	RLN6487A RLN6488A RLN6486A	PMNN4812
		APX NEXT XN Classic Holster (Belt clip sold separately)		PMLN8601	Thermoplastic	●	2.5" - PMLN8602 3" - PMLN8603 AY000223A01 AY000229A01	RLN6487A RLN6488A RLN6486A	PMNN4812
APX NEXT XE		APX NEXT XE Classic Holster (Belt clip sold separately)		PMLN8208	Plastic	●	2.5" - NTN8266 3" - PMLN7965 AY000223A01 AY000229A01	RLN6487A RLN6488A RLN6486A	NNTN9217
		APX NEXT XE Boston Leather Carry Case		PMLN8209	Leather	●	AY000223A01 AY000229A01	RLN6487A RLN6488A RLN6486A	NNTN9217
APX NEXT		APX NEXT Classic Holster (Belt clip sold separately)		PMLN7947	Plastic		2.5" NTN8266 3" PMLN7965		NNTN9216 NNTN9217 PMNN4895 PMNN4896
		APX NEXT Hybrid Leather Carry Case with Standard Battery		PMLN7948	Plastic/Leather		2.5" NTN8266 3" PMLN7965	2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	NNTN9216 NNTN9217
		APX NEXT Hybrid Leather Carry Case with Hi Capacity Battery		PMLN8753	Plastic/Leather		2.5" NTN8266 3" PMLN7965	2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	PMNN4895 PMNN4896



APX N portable radio carry accessories

COMPATIBILITY		CARRY SOLUTION		FEATURES			
CARRY SOLUTIONS Carry cases and holders are available in sizes designed to fit your radio and battery and permit audio to be heard clearly. Our carry accessories keep your hands-free, so you can concentrate on the task at hand.							
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	D-RINGS	ATTACHMENTS/REPLACEMENT KIT (SOLD SEPERATELY)	USE WITH BATTERIES
APX N70		APX N70 Classic Holster (Belt clip sold separately)	PMLN8371	Plastic		2.5" PMLN8507 3" PMLN8508	PMNN4816 PMNN4817 PMNN4818
		APX N70 hybrid leather holster, PMNN4816 battery	PMLN8372	Plastic/leather		2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	2.5" PMLN8507 3" PMLN8508 PMNN4816
		APX N70 hybrid leather holster, PMNN4817 battery	PMLN8373	Plastic/leather		2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	2.5" PMLN8507 3" PMLN8508 PMNN4817
		APX N70 hybrid leather holster, PMNN4818 battery	PMLN8374	Plastic/leather		2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	2.5" PMLN8507 3" PMLN8508 PMNN4818
APX N70 XE		APX N70 XE classic holster	PMLN8689	Plastic	●	2.5" - PMLN8507 3" - PMLN8508 AY000223A01 AY000229A01	RLN6487 RLN6488 RLN6486 PMNN4816 PMNN4817 PMNN4818
		APX N70 XE Boston leather carry case	PMLN8690	Leather	●	AY000223A01 AY000229A01	RLN6487 RLN6488 RLN6486 PMNN4818 (TIA battery ONLY)
APX N50 APX N30		APX N30/APX N50 hard leather carry case with 2.75 inch swivel belt loop	PMLN8609	Leather		2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	PMNN4813
		APX N30/APX N50 hard leather carry case with 2.75 inch swivel belt loop	PMLN8668	Leather		2.5" PMLN5407 2.75" PMLN5408 3" PMLN5409	PMNN4815



APX portable radio carry accessories

COMPATIBILITY	CARRY SOLUTION		FEATURES		
CARRY SOLUTIONS					
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	MATERIAL	BELT LOOP/ BELT CLIP (INCHES)	SWIVEL/ FIXED
APX NEXT XN (PMLN8238, PMLN8601) APX NEXT XE (PMLN8208, PMLN8209) APX N70 XE (PMLN8689, PMLN8690)	 Boston leather fireman's radio strap with button back holder	AY000223A01	Leather	Up to 51"	
	 Boston leather fireman's radio strap with button back holder - XL	AY000229A01	Leather	Up to 54"	
	 Boston leather fireman's radio strap - XL	RLN6487	Leather	Up to 70"	
	 Boston leather anti-sway strap for boston leather fireman's radio strap	RLN6488	Leather	Up to 9"	
	 Boston leather fireman's radio strap	RLN6486	Leather	Up to 62"	
APX NEXT XE (PMLN8208)	 2.5" hard plastic belt clip	NTN8266	Plastic	2.5"	Fixed
APX NEXT (PMLN7947, PMLN7948)	 3" hard plastic belt clip	PMLN7965	Plastic	3"	Fixed
APX NEXT XN (PMLN8601)	 2.5" hard plastic belt clip	PMLN8602	Thermoplastic	2.5"	Fixed
	 3" hard plastic belt clip	PMLN8603	Thermoplastic	3"	Fixed
APX NEXT (PMLN7948)	 2.5" leather swivel belt loop	PMLN5407	Leather	2.5"	Swivel
APX N70 (PMLN8372, PMLN8373, PMLN8374)	 2.75" leather swivel belt loop	PMLN5408	Leather	2.75"	Swivel
APX N50/APX N30 (PMLN8609, PMLN8668)	 3" leather swivel belt loop	PMLN5409	Leather	3"	Swivel
APX N70 XE (PMLN8689)	 APX N70 2.5" belt clip	PMLN8507	Plastic	2.5"	Fixed
APX N70 (PMLN8371, PMLN8372, PMLN8373, PMLN8374)	 APX N70 3" belt clip	PMLN8508	Plastic	3.0"	Fixed
APX N50 APX N30	 APX N30/APX N50 2.0" belt clip	PMLN8369	Plastic	2.0"	Fixed
	 APX N30/APX N50 2.5" belt clip	PMLN8370	Plastic	2.5"	Fixed



Antennas

Designed for wearability

Details

Motorola Solutions' redesigned antennas provide convenience without compromising performance. Shorter and more flexible, these antennas conform to the users' mission critical environments.

- The 7/800 MHz and UHF Stubby Antennas deliver great coverage but will not snag on clothing or equipment.
- The Whip, Single and All-band Antennas are fabricated using a new polymer that delivers 40% better flexibility.

Antenna ID bands

Colored antenna ID bands are available for easy customization and come in packs of 10.

- 32012144001 Gray
- 32012144002 Yellow
- 32012144003 Green
- 32012144004 Blue
- 32012144005 Purple

Will APX NEXT antennas (stubby single-band and flexible all-band) work with other APX family radios such as the APX 8000 and APX 6000?

No. The current APX antennas have an embedded GPS antenna. The APX NEXT antennas do not have an internal GPS element because the hardware is located inside the radio itself. This means that APX NEXT antennas cannot be used with other models of APX radios.



Stubby

Single band

All-band



APX portable radio antenna accessories

COMPATIBILITY	ACCESSORY			FEATURES				
ANTENNAS								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	UHF/VHF/ 700/800 MHz	FREQUENCY BAND (MHZ)	LENGTH (CM)	TYPE	HAZLOC- CAPABLE†
APX NEXT XN		All-Band, Whip Antenna	AN000417A01	All-band	136-174MHz, 380-520MHz, 760-870 MHz	20	Whip, All-Band	UL
APX NEXT XE APX NEXT		700/800 MHz, Stubby Antenna	AN000296A01	700/800	760-870 MHz	6.5	Stubby, Single Band	UL
		UHF, 380-470 MHz, Stubby Antenna	AN000369B01	UHF	380-470 MHz	9.0	Stubby, Single Band	UL
		UHF, 450-527 MHz Stubby Antenna	AN000369B02	UHF	450-527 MHz	9.0	Stubby, Single Band	UL
		700/800 MHz, Short Whip Antenna	AN000392A01	700/800	762-870 MHz	16.0	Short Whip, Single Band	UL
		UHF, 350-520 MHz, Short Whip Antenna	AN000393A01	UHF	350-520 MHz	14.0	Short Whip, Single Band	UL
		All-band Antenna	AN000297A01	All-band	136-174MHz, 380-520MHz, 760-870 MHz	20.0	Whip, All-Band	UL
APX N70 APX N70 XE APX N50 APX N30		700/800 MHz Short Whip Antenna	AN000411A01	700/800	762-870MHz	15.0	Short Whip, Single Band	UL
		380/520 MHz Whip Antenna * not applicable for APX N70XE *	AN000452A01	UHF	380-520MHz	12.0	Whip, Single Band	UL
		700/800 MHz Stubby Antenna	AN000418A01	700/800	762-870MHz	10.0	Stubby, Single Band	UL
APX N70 APX N50 APX N30		380/530 MHz stubby antenna	AN000451A01	UHF	380-520MHz	9.0	Stubby, single band	UL
APX N70		136-174 MHz VHF Whip antenna	AN000414A01	VHF	136-174MHz	12.0	Whip, Single Band	UL
APX N30 APX N50		136-174 MHz VHF Whip Antenna	AN000421A01	VHF	136-174MHz	18.0	Whip, Single Band	UL

* Requires PMLN8334A GCAI to GCAI mini cable adapter



APX N portable radio cable accessories

COMPATIBILITY		ACCESSORY	
CABLES			
PORTABLE RADIOS		DESCRIPTION	PART NUMBER
APX N70 APX N50 APX N30		Data cable	PMKN4265
		Test and align cable PSA	PMKN4231
		GCAI-mini cloning cable	PMKN4292
		GCAI-mini keyloader cable	PMKN4291


COMPATIBILITY		ACCESSORY	
CABLES			
PORTABLE RADIOS		DESCRIPTION	PART NUMBER
APX N70 XE		Data cable	PMKN4500
		Test and align cable PSA	PMKN4501
		GCAI-mini cloning cable	PMKN4502
		GCAI-mini keyloader cable	PMKN4503

COMPATIBILITY	ACCESSORY	
ADAPTER CABLE		
PORTABLE RADIOS	DESCRIPTION	PART NUMBER
APX NEXT XN	 10-Pin RFDC adapter cable	PMKN4262
APX NEXT	Cloning cable	PMKN4197

Not all APX radios and accessories are available in all regions.

COMPATIBILITY	ACCESSORY	
ADAPTER CABLE		
PORTABLE RADIOS	DESCRIPTION	PART NUMBER
APX N30 APX N50 APX N70 APX N70 XE	 GCAI mini to GCAI Cable Adapter	PMLN8334



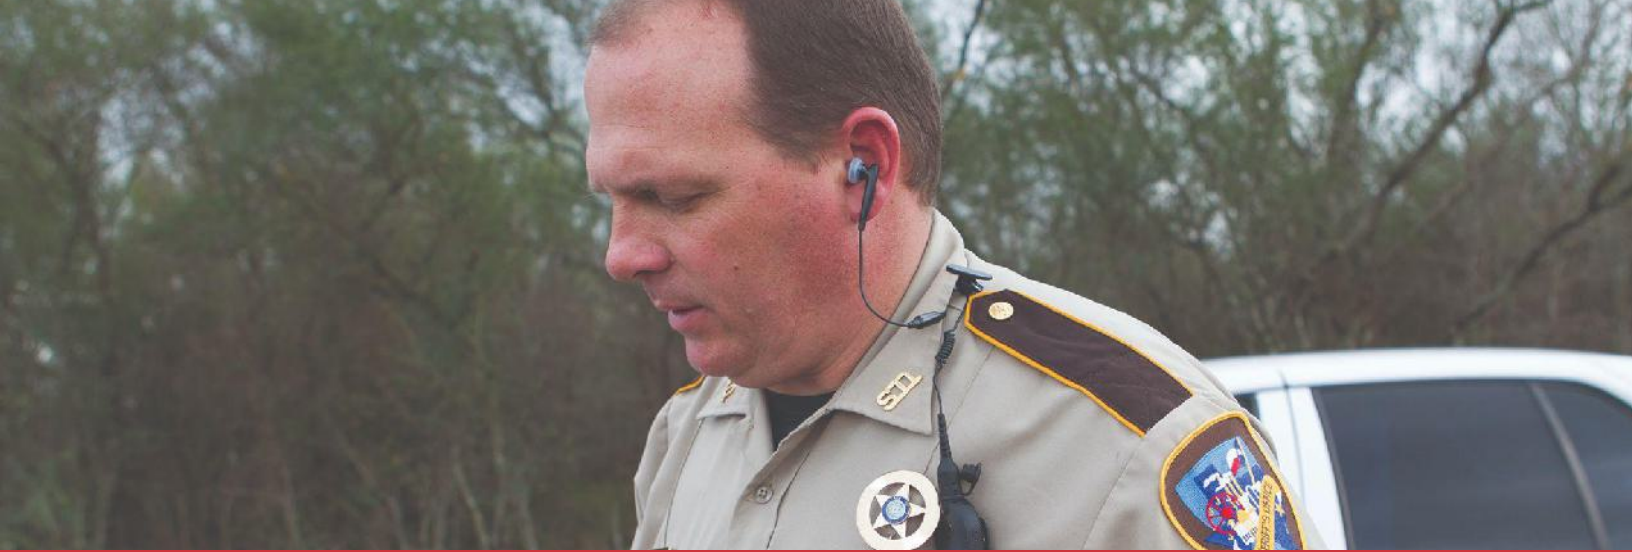

APX portable radio accessories



APX 8000HXE



APX 8000XE



APX 8000H



APX 8000



APX 6000XE



APX 6000



APX 4000
(2-knob)



APX 3000



APX 900



SRX 2200

Discontinued APX Portable radio models

APX 7000XE
APX 7000
APX 4000 1-knob
APX 1000



XVE500 RSM button configuration



Hear and be heard like never before

The XVE500 is the next generation mission-critical RSM designed for optimal use with APX NEXT™ XE radio. Equipped with four high dynamic range microphones, automatic audio leveling, noise reduction and a built in ViQi button, the XVE500 RSM delivers the clear, loud audio communications. Which allow easy access to radio controls and critical information. Whether you are in the heat of a fire or exposed to extreme weather conditions, the XVE500 will keep you connected to your team. This RSM was designed to withstand heat exposure of 500°F (260°C) for up to 5 minutes.

Key features

- Heat resistant housing and cable
- Loudest, clearest speaker
- Four High Dynamic Range (HDR) microphones
- Dedicated ViQi button
- Water and Wind Shielding
- New adaptive noise suppression
- Illuminated emergency button



APX portable radio RSMs

COMPATIBILITY		ACCESSORY		FEATURES								
REMOTE SPEAKER MICROPHONES (RSM) Our robust portfolio includes Remote Speaker Microphones and secondary audio accessories engineered to give you clearer communications even in loud environments.												
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VOLUME CONTROL	ORANGE BUTTON	CHANNEL CONTROL	PROGRAMMABLE BUTTON	IP RATING	HAZLOC-CAPABLE†	SIZE (WITHOUT CLIP) (MM)
APX NEXT XE* APX NEXT* APX 8000 APX 8000XE APX 8000H APX 8000HXE APX 6000 APX 6000XE		XVE500 high impact green, channel knob, Xtreme temperature cable	PMMN4154_T	•	Multi-mic noise suppression	•	•	•	2	IP68	UL	75 x 98 x 34
		XVE500 black housing, channel knob, Xtreme temperature cable	PMMN4154_TBLK	•	Multi-mic noise suppression	•	•	•	2	IP68	UL	75 x 98 x 34
		XVE500 high impact green, no channel knob, Xtreme temperature cable	PMMN4152_T	•	Multi-mic noise suppression	•	•		2	IP68	UL	75 x 98 x 34
		XVE500 black housing, no channel knob, Xtreme temperature cable	PMMN4152_TBLK	•	Multi-mic noise suppression	•	•		2	IP68	UL	75 x 98 x 34

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

*RSM Firmware:

1. Ensure the radio firmware is updated to the latest version
2. Radio will update the RSM firmware automatically once the RSM is connected to the radio.

Enhanced controls

The XVE500 RSM is an evolution of the XE500 RSM platform and like its predecessor was designed with the user's extreme environment in mind. From the exaggerated knobs and controls, that are easy to operate with bulky gloves to the asymmetrical shape that makes it easier to find the controls without looking.

Adaptive audio engine

XVE500 RSM utilizes 4 integrated microphones and an Adaptive Audio Engine. Similar to the radio, it automatically changes the level of noise suppression, microphone gain, Windporting and speaker equalization to produce clear and loud audio in any environment.

Flexible wearing

The strategic placement of the microphones and enhanced water drainage provide users with the flexibility to wear it straight, upside down and even sideways while still delivering loud and clear audio.

Extreme performance

Whether you are in the heat of a fire or exposed to extreme weather conditions the XVE500 will keep you connected to your team. This RSM was designed to withstand heat exposure of 500°F (260°C) for up to 5 minutes. Built as a system, the APX NEXT XE and APX 8000XE with the XVE500 have been tested to meet IP68 (2 meter, 4 hours) submersibility specifications.



APX portable radio RSM accessories

COMPATIBILITY		ACCESSORY	
REMOTE SPEAKER MICROPHONE ACCESSORIES AND REPLACEMENT PARTS			
RSM	DESCRIPTION		PART NUMBER
FIRE RSM REPLACEMENT PARTS			
XVE500 XE500		XVE500 RSM clip assembly with brass insert designed to work with the boston leather straps (AY000223A01, AY000229A01) requires clip button NNTN8749	PMLN7633
XVE500		Xtreme temperature replacement cable for XVE500 RSM (GCAI connector)	PMKN4508A
		Replacement channel knob for XVE500 RSM (20pcs per pack)	PMLN7653
XE500		Xtreme temperature replacement cable for XE500 RSM only	PMKN4264A
XE		Xtreme temperature replacement cable for XE RSM (NNTN8203 and NNTN8575 series)	30009402002
		XE RSM clip assembly with brass insert designed to work with the boston leather straps (AY000223A01, AY000229A01) requires clip button NNTN8749	NNTN8271
XVE500 XE500 XE		Clip Button (5pc per pack)	NNTN8749

Fire market solution

The XVE500, XE500 and XE RSM clip paired with a clip button allows easy and secure access to your RSM when used with a Boston Radio Strap with Button Back Holder.



RLN6486

Key features

- Multi-mic capability: four high dynamic range microphones
- Advanced windporting
- Adaptive noise suppression
- Intrinsically safe, Div 1 certified
- Enhanced ergonomic design



XVP Remote speaker microphone

Maximize your mission critical voice technology

The XVP RSM utilizes an enhanced end-to-end audio design for increased clarity that enables more intelligible communications in the loudest environments and speaking from any direction.

APX portable radio accessories

COMPATIBILITY	ACCESSORY		FEATURES										
REMOTE SPEAKER MICROPHONES (RSM) Our robust portfolio includes Remote Speaker Microphones and secondary audio accessories engineered to give you clearer communications even in loud environments.													
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VOLUME CONTROL	ORANGE BUTTON	CHANNEL CONTROL	PROGRAMMABLE BUTTON	AUDIO JACK	IP RATING	HAZLOC-CAPABLE†	SIZE (WITHOUT CLIP) (MM)
APX 8000XE APX 8000H APX 8000HXE APX 8000 APX 6000XE APX 6000 APX 5000 SRX2200		XVP850 RSM with channel knob (TAA compliance)	PMMN4135_TAA	•	Multi-mic noise suppression	•	•	•	3	3.5 mm	IP68	UL	93 x 58 x 31
		XVP830 RSM without channel knob (TAA compliance)	PMMN4136_TAA	•	Multi-mic noise suppression	•	•		3	3.5 mm	IP68	UL	93 x 58 x 31
		XVP850 RSM with channel knob	PMMN4135	•	Multi-mic noise suppression	•	•	•	3	3.5 mm	IP68	UL	93 x 58 x 31
		XVP830 RSM without channel knob	PMMN4136	•	Multi-mic noise suppression	•	•		3	3.5 mm	IP68	UL	93 x 58 x 31
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 5000 APX 4000 APX 1000 APX 900		IMPRES windporting RSM with volume toggle switch, orange button, 3.5mm non-threaded jack (IP68)	PMMN4099	•	Windporting	•	•		1	3.5 mm	IP68	UL	60 x 78 x 28
SRX 2200		Windporting RSM, coyote brown, (IP57)	NNTN8235		Windporting						IP57	UL	55 x 60 x 27
		Windporting RSM with non-threaded 3.5mm audio jack, coyote brown, (IP54)	NNTN8236		Windporting					3.5 mm	IP54	UL	55 x 60 x 27

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

*TAA: Trade Agreements Act, relevant to U.S. Federal Government business



Easy access to ViQi

ViQi is your virtual assistant, designed for public safety. the three-dot dedicated viqi button on your xvp rsm allows you to operate ViQi from your shoulder.

It's ViQi's job to quickly provide the information you need to stay safe and effective. Checking a driver's license? Just ask her. Need to run a plate? She's on it. She'll even discreetly warn you to move out of earshot if she has important information to share.

She understands natural language voice commands, from changing zone, channel and volume, to getting status checks. All while keeping your hands free and your focus on your surroundings.

Click [here](#) to learn more about ViQi.

APX portable radio accessories

COMPATIBILITY		ACCESSORY		FEATURES	
REMOTE SPEAKER MICROPHONE SECONDARY AUDIO ACCESSORIES					
RSMS	DESCRIPTION		PART NUMBER	EARPIECE TYPE	CONNECTOR TYPE
WM800 XVP850 XVP830 XVP750 XVP730		N-ear 360 Flexo Dynamic™ Braided Fiber Cloth™ earpiece	PMLN8650	Clear rubber eartip	3.5mm
		Receive-only earpiece with coiled translucent tube, loud audio	PMLN8652	Clear rubber eartip	3.5mm
RM780		Receive-only earpiece with Loud Audio Translucent Tube	PMLN8120	Clear rubber eartip	3.5mm

COMPATIBILITY	ACCESSORY		
REMOTE SPEAKER MICROPHONE ACCESSORIES AND REPLACEMENT PARTS			
PORTABLE RADIOS	DESCRIPTION		PART NUMBER

RSM REPLACEMENT PARTS			
XVP850 XVP830		Replacement coil cord	PMKN4260
XVP750 XVP730		Replacement coil cord	PMKN4461
WM800 XVP850 XVP830 XVP750 XVP730		Low profile swivel clip with D-ring (10pcs per pack)	PMLN8312
		Swivel molle clip (1pc)	PMLN8675
XVP850 XVP750		Replacement channel knob	PMLN8313
XP		XP RSM replacement cable with audio jack	PMKN4222
		XP RSM replacement cable without audio jack	NKN6611
PMMN4062 PMMN4065 PMMN4069 PMMN4083		Replacement coil cord	PMKN4234
PMMN4099		Replacement coil cord	PMKN4235
RM780		Replacement cable for RM780	PMKN4462
		Replacement dust cover for RM780 (10pcs per pack)	PMLN8122
		Replacement low profile swivel clip	PMLN8121
MCW XP		D-ring swivel clip (12 pack). compatible with all XP RSMs and wireless RSMs	NNTN4990



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES			
REMOTE SPEAKER MICROPHONE ACCESSORIES AND REPLACEMENT PARTS						
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	CONNECTOR TYPE	HAZLOC-CAPABLE†	
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		Receive-only earpiece with comfort eartube, UL approved	RLN4941**	Clear rubber eartip	3.5mm	UL
		Receive-only earpiece with comfort eartube. Extra loud audio output	RLN4941_XL - NA MDRLN4941 - APAC	Clear rubber eartip	3.5mm	UL
		Receive-only earpiece with Comfort Eartube	PMLN7560	Clear rubber eartip	3.5mm	
		Receive-only earbud, UL approved	AARLN4885	Foam earbud	3.5mm	UL
		Receive-only earpiece, loud version. Required BDN6783 or NMN6274	RLN5313_XL	Clear rubber eartip	3.5mm	
		Adjustable D-style earpiece	PMLN7396	Over-the-ear	3.5mm	
		D-shell Rx-only earpiece	PMLN4620**	Over-the-ear	3.5mm	UL
		Receive-only flexible earpiece	WADN4190	Over-the-ear	3.5mm	UL

* For High Noise Kit solution - combine RLN6242 Low Noise Kit with translucent tube and clear rubber eartip and RLN6281 Replacement Foam Plugs for RLN6242. Noise reduction = 25dB.

** Also compatible with APX8000H & APX8000HXE.

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.





APX portable radio accessories

COMPATIBILITY		ACCESSORY		FEATURES									
PUBLIC SAFETY MICROPHONES Our robust portfolio includes Public Safety Microphones and secondary audio accessories engineered to give you clearer communications even in loud environments.													
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VOLUME CONTROL	ORANGE BUTTON	PROGRAMMABLE BUTTON	AUDIO JACK	IP RATING	HAZLOC-CAPABLE†	SIZE (WITHOUT CLIP) (MM)	
APX8000 APX8000XE APX8000HXE APX6000XE APX6000 SRX2200		Public safety microphone (30 inch cable) PSM Antenna required. VHF not supported.	PMMN4061	•	Windporting	•	•	1	3.5 mm	IP55	UL	60 x 78 x 28	
		Public safety microphone (24 inch cable) PSM Antenna required. VHF not supported. Recommended for use with UHF radios.	PMMN4060	•	Windporting	•	•	1	3.5 mm	IP55	UL	60 x 78 x 28	
		Public safety microphone (24 inch cable) PSM Antenna required. VHF not supported. Recommended for use with 7/800MHz radios.	PMMN4060-SP01	•	Windporting	•	•	1	3.5 mm	IP55	UL	60 x 78 x 28	
		Public safety microphone (18 inch cable) PSM Antenna required. VHF not supported.	PMMN4059	•	Windporting	•	•	1	3.5 mm	IP55	UL	60 x 78 x 28	

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.
* The top image features the multi-mic XVP Remote Speaker Microphone





How do mission critical wireless accessories help me?

They free you from being physically connected to the radio and are ideal for surveillance operations. They look consumer, but are mission critical in performance and provide exceptional flexibility, high security, superior audio performance and a new dimension of freedom. Carry your radio in a backpack, bag or purse without being constrained by wires.

WM800 Wireless Remote Speaker Microphone

The WM800 RSM enables loud and intelligible communications in the noisiest environments, allowing seamless transmissions from any direction.

The mission critical WM800 Wireless Remote Speaker Microphone delivers ultra clear audio communications in a compact, wireless design. Built as a unified system with APX NEXT, N-line and Standard APX radios, the WM800 RSM redefines communication ensuring your voice is heard in every direction even in the most challenging environments. Clarity, reliability and durability converge to empower your mission's success. Every feature on this RSM has been purposefully designed with all of the advanced capabilities of Mission Critical Wireless device including four high dynamic range microphones, adaptive noise suppression and enhanced security.

Additional features include 3 programmable buttons, an emergency button, a volume control, audio jack and task light that allows you to read items such as a driver's license in the dark. This RSM features all of the advanced capabilities of Mission Critical Wireless including enhanced security, fast push-to-talk and quick touch pairing with voice prompts that confirm pairing actions. This RSM also features a removable and rechargeable battery.



APX portable radio accessories

COMPATIBILITY	ACCESSORY		FEATURES							
MISSION CRITICAL WIRELESS (MCW) REMOTE SPEAKER MICROPHONES (RSM) Our robust portfolio includes Remote Speaker Microphones and secondary audio accessories engineered to give you clearer communications even in loud environments.										
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES AUDIO	MICROPHONE NOISE SUPPRESSION	VOLUME CONTROL	ORANGE BUTTON	AUDIO JACK	IP RATING	SIZE (WITHOUT CLIP) (MM)
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 2000 APX 3000 SRX 2200	 Wireless RSM with battery, Clip (RLN6544) and dual unit charger (PMLN7120)		RLN6554		Windporting	●	●	3.5mm	IP55	88 x 63 x 26
	 Wireless RSM with battery and clip. No charger.		RLN6544		Windporting	●	●	3.5mm	IP55	88 x 63 x 26

COMPATIBILITY	ACCESSORY	
WIRELESS RSM ACCESSORIES AND REPLACEMENT PARTS		
PORTABLE RADIOS	DESCRIPTION	PART NUMBER
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200	 Dual unit C-charger, rapid rate charger, 120V (US Plug)	PMLN7120
	 Vehicular charger	PMLN6716
	 Wireless RSM battery, 1800 mAh Li-Ion	PMNN4461
	 D-ring swivel clip (12 pack) Compatible with all XP RSMs and wireless RSMs	NNTN4990

COMPATIBILITY		ACCESSORY		FEATURES										
MISSION CRITICAL WIRELESS (MCW) ACCESSORIES This portfolio is a game changer, giving you the flexibility to remove the radio from your belt and stay connected within 30 feet.														
PORTABLE RADIOS		DESCRIPTION		PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT	TALK TIME (HOURS) 5/5/90 DUTY CYCLE	CHARGE TIME (HOURS)	WEIGHT (GRAMS)	SIZE (MM)	RANGE (FEET LINE OF SIGHT)	IP RATING	
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		Mission critical wireless earpiece with 12" cable and push-to-talk pod	NTN2570	Over-the-ear (Comm-Port™)	Directional, above the earpiece	•	10	3	43	70 x 41 x 25	30	IP54		
		Mission critical wireless push-to-talk pod	NTN2571			•	10	3	43	70 x 41 x 25	30	IP54		
		Accessory kit for completely discreet wireless surveillance kit. includes: wireless neckloop, y-adapter and retention hook (NNTN8385), completely discreet earpiece kit (PMLN7696) and mission critical wireless push-to-talk pod (NTN2571)	NNTN8434											

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES			
MISSION CRITICAL WIRELESS (MCW) ACCESSORIES This portfolio is a game changer, giving you the flexibility to remove the radio from your belt and stay connected within 30 feet.						
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		Single-wire surveillance kit with quick disconnect translucent tube for wireless push-to-talk pod	PMLN7052	Clear rubber eartip	In-line	On pod, ordered separately
		Single-wire earbud with 11.5" cable for wireless push-to-talk pod, black	NNTN8294	Earbud	In-line	On pod, ordered separately
		Single-wire earbud with 45" cable for wireless push-to-talk pod, black	NNTN8295	Earbud	In-line	On pod, ordered separately
		Covert audio kit for mission critical wireless PTT pod	NNTN8296	1 earbud and 2 earbud headsets	In-line	On pod, ordered separately
		Y-adapter and retention hook for mission critical wireless push-to-talk pod	NNTN8385		Directional, on separate wire	On pod, ordered separately
		Neckloop for Discreet Earpiece Kit	RLN4920			
		Accessory kit for completely discreet wireless surveillance kit. includes: wireless neckloop, y-adapter and retention hook (NNTN8385), completely discreet earpiece kit (PMLN7696) and mission critical wireless push-to-talk pod (NTN2571)	NNTN8434			
		Commercial 3.5mm earbud headset adapter, 10 per pack	NNTN8737			
		Replacement wireless earpiece cable, 12 inch	NTN2572	Over-the-ear (CommPort™)	Directional above the ear commPort	On pod, ordered separately





APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES		
MISSION CRITICAL WIRELESS (MCW) ACCESSORIES This portfolio is a game changer, giving you the flexibility to remove the radio from your belt and stay connected within 30 feet.					
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200	 Eartubes for CommPort™ earpiece (10 per pack)	RLN5037	Over-the-ear (CommPort™)		
	 Ear strap for CommPort™ earpiece to secure earpiece to ear (10 per pack)	NTN8988	Over-the-ear (CommPort™)		
	 Replacement ear tips kit for wireless ear buds (20 small, 20 medium, 20 large and 10 clips)	NNTN8361	Earbud		
	 Replacement swivel clip for wireless PTT pod	PMLN6246			
	 Replacement or spare micro-USB plug-in charger (US)	PS000228A01			



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES		
OPERATIONS CRITICAL WIRELESS (OCW) ACCESSORIES This portfolio is a game changer, giving you the flexibility to remove the radio from your belt and stay connected within 30 feet.					
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT
APX 900	 Bluetooth accessory kit with flexible earpiece, bluetooth pod, and charging cradle with power supply	RLN6500	Over-the-ear (swivel)	Boom	On earpiece
	 Flexible earpiece with boom microphone for RLN6500	PMLN7203	Over-the-ear (Swivel)	Boom	On pod, ordered separately
APX 4000 APX 2000 APX 1000 APX 900	 Operations critical wireless earpiece with 12 inch cable	NNTN8125	Over-the-ear (CommPort™)	Directional, above the earpiece	On pod
	 Operations critical wireless push-to-talk pod with charger	NNTN8127			On pod
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 900 SRX 2200	 Accessory kit for completely discreet wireless surveillance kit. includes: wireless neckloop, Y-adapter and retention hook (NNTN8385), completely discreet earpiece kit (PMLN7696) and mission critical wireless push-to-talk pod (NTN2571)	NNTN8434	-	-	-
	 Single-wire surveillance kit with quick disconnect translucent tube for wireless push-to-talk pod for pod	PMLN7052	Clear rubber eartip	In-line	On pod, NNTN8127 ordered separately
	 Single-wire earbud with 11.5" cable for wireless push-to-talk pod, black	NNTN8294	Earbud	In-line	On pod, NNTN8127 ordered separately
	 Single-wire earbud with 45" cable for wireless push-to-talk pod, black	NNTN8295	Earbud	In-line	On Pod, NNTN8127 ordered separately
	 Replacement wireless earpiece cable, 12 inch	NTN2572	Over-the-ear (CommPort™)	Directional above the ear commport	On pod, NNTN8127 ordered separately
	 Covert audio kit for operations critical wireless PTT pod	NNTN8296			





APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES		
OPERATIONS CRITICAL WIRELESS (OCW) ACCESSORIES					
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 900 SRX 2200	 XBT operations critical wireless behind-the-neck headset	RLN6490	Headset	Boom	Headset or on pod NNTN8127 ordered separately
	 XBT operations critical wireless headband style Headset	RLN6491	Headset	Boom	Headset or on pod NNTN8127 ordered separately





How does Commport™ work?

The miniature microphone and receiver connect to your APX radio and fasten securely and comfortably to your ear. Unlike bone conduction or boom mic technology, the CommPort System picks up sound waves as they cross the face so you hear and can be heard virtually in any environment.

APX portable radio accessories

COMPATIBILITY		ACCESSORY
COMMPORT™ Integrated microphone/receiver lets you talk discreetly and hear clearly and still be aware of everything around you, from traffic noise to other responders.		
PORTABLE RADIOS	DESCRIPTION	PART NUMBER
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200	 Replacement palm PTT for RLN6480	NKN6510
	 Replacement cable for RLN6481	NKN6508
	 Replacement remote body PTT for RLN6484	NNTN4188
	 Ear straps for secure attachment to ear (pack of 10)	NTN8988



APX portable radio audio accessories

COMPATIBILITY		ACCESSORY		FEATURES						
EAR MICROPHONE SYSTEM										
PORTABLE RADIOS		DESCRIPTION		PART NUMBER	IMPRES	EARPIECE TYPE	MICROPHONE	PTT	PROGRAMMABLE BUTTON	HAZLOC-CAPABLE†
APX8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200	 IMPRES ear microphone with bone conduction and programmable button, black		PMLN5653		In-ear mic		In-ear mic	Large, ring-guarded, recessed		
	 Earguard with adjustable loop		0180300E25	How does IMPRES improve audio performance? IMPRES enhances the clarity and audio quality of Motorola accessories by reducing ambient noise and improving voice intelligibility. If you speak quietly or normally, but not directly into a microphone, IMPRES Audio detects changes in your voice and automatically adjusts the transmitted volume so your						
	Earholder, clear, large		0180358B37							

COMPATIBILITY	ACCESSORY		FEATURES						
SURVEILLANCE KITS Transmit and receive discreetly with a variety of surveillance kits that feature a streamlined design and rugged cables that withstand tough conditions. A quick-disconnect, durable and comfortable translucent tube enables easy sharing between shifts.									
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	EARPIECE TYPE	MICROPHONE	PTT	PROGRAMMABLE BUTTON	HAZLOC-CAPABLE†	
APX 8000 APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 1000 SRX 2200	 1-wire receive-only earpiece, black	PMLN6125	•	Ear hanger					UL
	 1-wire receive-only earpiece, beige	PMLN6126	•	Ear hanger					UL
	 IMPRES 2-wire surveillance kit, programmable button, black	PMLN6127	•	Ear hanger					UL
	 IMPRES 2-wire surveillance kit, programmable button, beige	PMLN6128	•	Ear hanger					UL

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES					
SURVEILLANCE KITS								
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	EARPIECE TYPE	MICROPHONE	PTT	PROGRAMMABLE BUTTON	HAZLOC-CAPABLE*
APX 8000 APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		IMPRES 2-wire surveillance kit with translucent tube, programmable button, black PMLN6129		Clear rubber eartip				UL
		IMPRES 2-wire surveillance kit with translucent tube, programmable button, beige PMLN6130		Clear rubber eartip	Mic and PTT combined on a single wire	Mic and PTT combined on a single wire		
APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		IMPRES 3-wire surveillance kit with translucent tube, programmable button, black PMLN6123		Clear rubber eartip				UL
		IMPRES 3-wire surveillance kit with translucent tube, programmable button, beige PMLN6124		Clear rubber eartip	Separate wire	Separate wire		

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable. PMLN6129 is also compatible with APX8000.



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES			
SURVEILLANCE KITS						
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	MICROPHONE	PTT	HAZLOC-CAPABLE†
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200	 1-wire receive-only surveillance kit with translucent tube, black, 3.5mm threaded. requires BDN6783.	RLN5313*	Clear Rubber Eartip			UL
	 1-wire receive-only surveillance kit with translucent tube, black, loud version, 3.5mm threaded. Requires BDN6783 or NMN6274.	RLN5313_XL	Clear Rubber Eartip			
	 2-wire surveillance kit with translucent tube, black, 3.5mm threaded. Requires BDN6783.	RLN5312	Clear Rubber Eartip	Mic and PTT Combined on a Single Wire	Mic and PTT Combined on a Single Wire	
	 2-wire surveillance kit with extra-loud earpiece, beige, 3.5mm threaded. Requires BDN6783.	BDN6669	Ear Hanger	Mic and PTT Combined on a Single Wire	Mic and PTT Combined on a Single Wire	

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

* Also compatible with AP8000H and APX8000HXE.



APX portable radio audio accessories

COMPATIBILITY	ACCESSORY		FEATURES	
SURVEILLANCE KIT ACCESSORIES AND REPLACEMENT PARTS				
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	EARPIECE TYPE	COMPATIBLE SURVEILLANCE KITS
APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200	 Completely discreet earpiece kit with neckloop, beige, includes GMLN5261, RLN4920 and RNN4005	PMLN7696		
	 Phonak nano ear receiver, beige (neckloop must be ordered separately)	GMLN5261		
	 Phonak nano ear receiver, brown (neckloop must be ordered separately)	GMLN5262		
	 Optional Retention Hooks, Pack of 10	NNTN8457		
	Phonak inductive neckloop included in the PMLN7696	RLN4920		
	Low noise kit with quick disconnect translucent tube and clear rubber eartip	RLN6242	Clear rubber eartip	PMLN6123, PMLN6124, PMLN6129, PMLN6130
	 Replacement standard clear rubber eartip, pack of 50	RLN6282	Clear rubber eartip	PMLN6123, PMLN6124, PMLN6125, PMLN6126, PMLN6127, PMLN6128, PMLN6129, PMLN6130
	 Replacement foam plugs for RLN5887 and RLN6242. Noise reduction = 25dB.* Pack of 50 pairs.	5080384F72	Foam eartip	PMLN6123, PMLN6124, PMLN6129, PMLN6130
	 Low noise kit with 1 clear rubber eartip	RLN5886	Clear rubber eartip	RLN5882, RLN5883, PMLN5111, PMLN5112,
	 Clear EP7-small hearing protectors [sonic defenders] ultra earplugs noise reduction = 28dB	RLN6511	Comply™ Foam eartip	RLN5882, RLN5883, PMLN5111, PMLN5112, PMLN6123, PMLN6124, PMLN6125, PMLN6126, PMLN6127, PMLN6128, PMLN6129, PMLN6130, PMLN8120
	 Clear EP7-medium hearing protectors [sonic defenders] ultra earplugs noise reduction = 28dB	RLN6512	Comply™ foam eartip	
	 Clear EP7-large hearing protectors [sonic defenders] ultra earplugs noise reduction = 28dB	RLN6513	Comply™ foam eartip	

* For High Noise Kit solution - combine RLN6242 Low Noise Kit with translucent tube and clear rubber eartip and RLN6281 Replacement Foam Plugs for RLN6242. Noise reduction = 25dB.





APX portable radio audio accessories

COMPATIBILITY		ACCESSORY		FEATURES	
SURVEILLANCE KIT ACCESSORIES AND REPLACEMENT PARTS					
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	EARPIECE TYPE	
RLN5882 RLN5883 PMLN5111 PMLN5112 PMLN6123 PMLN6124 PMLN6125 PMLN6126 PMLN6127 PMLN6128 PMLN6129 PMLN6130 PMLN8120		Small clear comfortable earpiece, right ear	RLN4760	Clear comfortable earpiece	
		Medium clear comfortable earpiece, right ear	RLN4761	Clear comfortable earpiece	
		Large clear comfortable earpiece, right ear	RLN4762	Clear comfortable earpiece	
		Small clear comfortable earpiece, left ear	RLN4763	Clear comfortable earpiece	
		Medium clear comfortable earpiece, left ear	RLN4764	Clear comfortable earpiece	
		Large clear comfortable earpiece, left ear	RLN4765	Clear comfortable earpiece	
SURVEILLANCE KIT AUDIO ADAPTERS					
APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200	3.5mm threaded audio adapter		BDN6783†	UL Approved: BDN6667, BDN6668, BDN6669, BDN6728, BDN6729, BDN6730, BDN6731, BDN6670 Other: BDN6664, BDN6665, BDN6666, BDN6726, BDN6727, BDN6732	
		6 pin Hirose keyload and audio adapter	NNTN7869	ZMN6038ASP01	

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.





APX portable radio audio accessories

COMPATIBILITY			ACCESSORY			FEATURES					
HEADSETS											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	HEADSET TYPE	SPEAKER	NOISE-CANCELLING / NOISE-REDUCTION	MICROPHONE	PTT	HAZLOC-CAPABLE†	WEIGHT
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		IMPRES temple transducer with boom microphone and in-line push-to-talk replacement rubber temple cover (1 pair) 7580384M19	PMLN5101	●	Behind-the-head	Bone conduction		Boom	In-line	UL	Lightweight
		Earset D-shell	PMLN5096*		Over-the-ear	Single-ear		Boom	In-line	UL	Lightweight
		Heavy-duty behind-the-head headset with noise-cancelling boom microphone, noise reduction = 24dB	PMLN6852		Behind-the-head	Dual-ear	●	Boom	On ear cup		Heavy-duty
		Heavy-duty behind-the-head headset with noise-cancelling boom microphone, noise reduction = 24dB	PMLN6853*		Behind-the-head	Dual-ear	●	Boom	On ear cup	UL	Heavy-duty
		Heavy-Duty over-the-head headset with noise-cancelling boom microphone, noise reduction = 24dB	PMLN7466		Over-the-head	Dual-ear	●	Boom	On ear cup		Heavy-duty
		Heavy-duty over-the-head headset with noise-cancelling boom microphone, noise reduction = 24dB	PMLN7467*		Over-the-head	Dual-ear	●	Boom	On ear cup	UL	Heavy-duty
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 2000 APX 1000 APX 900 SRX 2200		Lightweight over-the-head headset single muff with in-line push-to-talk & boom mic REX4648 - replacement foam earpad and microphone cover kit	RMN5058		Over-the-head	Single-ear		Boom	In-line	UL	Lightweight
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 900 SRX 2200		XBT operations critical wireless behind-the-neck headset	RLN6490		Behind-the-neck	Dual-ear	●	Boom	Radio, headset or wireless PTT pod		Heavy-duty
		XBT operations critical wireless headband-style headset	RLN6491		Over-the-head	Dual-ear	●	Boom	Radio, headset or wireless PTT pod		Heavy-duty

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

* Also compatible with AP8000H and APX8000HXE.



APX portable radio accessories

COMPATIBILITY	ACCESSORY		FEATURES							
3M PELTOR HEAVY DUTY HEADSETS										
PORTABLE RADIOS	DESCRIPTION AND ADAPTER TYPE		PART NUMBER	HEADSET TYPE	CONNECTOR TYPE	SPEAKER	NOISE REDUCTION RATING (NRR)	NOISE - CANCELLING MICROPHONE	PTT (APX)	HAZLOC - CAPABLE†
DIRECT CONNECT										
PTT ADAPTER CONFIGURATIONS										
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		TacticalPro series neckband headset with nexus connector	RMN5135 (limited availability)	Neckband	Nexus	Dual-ear	25dB	Boom	Requires PTT adapter PMLN6095	
		PTT nexus adapter. requires one of the six headsets listed directly above	PMLN6095							
HEADSET REPLACEMENT PARTS										
APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		Earmuff hygiene kit black ear seals	RLN4923							
		Boom microphone wind screen	RLN6543							

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX portable radio audio accessories

COMPATIBILITY		ACCESSORY		FEATURES			
HEARING PROTECTION							
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	HEADSET TYPE	SPEAKER	NOISE-CANCELLING / NOISE-REDUCTION
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		Clear EP7-Small Hearing Protectors [Sonic Defenders] Ultra Earplugs, noise reduction = 28dB	RLN6511		Comply™ Foam Ear tip		Noise-Reduction
		Clear EP7-Medium Hearing Protectors [Sonic Defenders] Ultra Earplugs, noise reduction = 28dB	RLN6512		Comply™ Foam Ear tip		Noise-Reduction
		Clear EP7-Large Hearing Protectors [Sonic Defenders] Ultra Earplugs, noise reduction = 28dB	RLN6513		Comply™ Foam Ear tip		Noise-Reduction
TACTICAL SOLUTIONS							
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		Tactical PTT/VOX Interface Module	PMLN6765				
		Tactical PTT Only Interface Module	PMLN6827				
		Tactical Boomless Temple Transducer Requires Interface Module PMLN6765 or PMLN6827.	PMLN6766		Over-the-Head	Bone Conduction	Noise-Cancelling
		Tactical Throat Microphone Requires Interface Module PMLN6765 or PMLN6827.	PMLN6828		Neckband	Earbud	Noise-Cancelling
		Tactical Ear Microphone Requires Interface Module PMLN6765 or PMLN6827.	PMLN6829		In-Ear	In-Ear	Noise-Cancelling
		Tactical Temple Transducer / Boom Mic Requires Interface Module PMLN6765 or PMLN6827.	PMLN6833		Over-the-Head	Bone Conduction	Noise-Cancelling
		Tactical Remote Body PTT For use with Interface Module PMLN6765 or PMLN6827.	PMLN6767				
		Tactical Remote Ring PTT For use with Interface Module PMLN6765 or PMLN6827.	PMLN6830				

What are the EP7 Sonic defenders ultra earplugs?

RLN6511, RLN6512, RLN6513
The EP7 Sonic Defenders Ultra
 Earplugs provide extra comfort and/or noise protection for users wearing surveillance accessories or users wearing heavy duty headsets / helmets. With a foam-tipped stem design and soft memory-foam Comply™ Canal Tips, these comfortable earplugs protect your hearing without blocking your ability to hear routine sounds or conversations. Safe sounds are allowed to pass through into the ear canal, while potentially harmful noises (above 85dB) are reduced through a filter.

Filter caps are included and can be inserted for additional hearing protection or removed for use with surveillance kits.* With a patented EarLock® technology to hold them in place, all-day comfort, and a low-profile design, these earplugs can be worn while wearing a helmet or mask, or while using a phone or heavy duty headset. Lanyard is included in each earplug kit.

Motorola's Tactical Solution offers a high performance interface enhanced by high speed DSP (Digital Signal Processor) which only detects the human voice.

Providing steady and trouble free transmission without clipping your message even in the noisiest environments.

Combined with various headsets assures efficient and safer operation in a variety of work environments.





IMPRES 2 – A new generation. completely re-energized.

With IMPRES 2 chargers, you can charge IMPRES 2 batteries up to 40% faster. Customize your charging to extend the life of batteries in storage. And manage power more intelligently with enhanced diagnostics, so you get the most from each battery. IMPRES 2 batteries have been improved inside and out, so your team can tackle whatever the day brings. With higher capacity, you'll get more talk time. With better water resistance, you'll never think twice about submersion. And with the ability to charge up to 60% more times than standard Lithium Ion batteries, you'll reduce costs.





Increased capacity

Do more without the bulk.

First responders, public works employees, and other professionals know that shifts aren't getting any shorter. Thankfully, you can keep your people connected even longer. IMPRES 2 batteries deliver higher capacity without an increase in size.



Durable design

Tackle the toughest conditions.

Wherever the job takes you, be confident your battery will be up to the challenge. All IMPRES 2 batteries share the same IP68 rating as APX radios, which means they can be fully submersed in two meters of water for up to four hours. Designed with a rugged housing, they're as tough as the radios they charge. And in test after test, IMPRES 2 batteries continually withstand shocks, knocks, drops and shakes, outperforming the competition every time.



Extended battery life

Extended life. Built to last.

You face challenges every day. Battery life shouldn't be one of them. IMPRES 2 batteries, when combined with an IMPRES 2 charger, deliver up to 60% more charging cycles than traditional Lithium Ion batteries, so they're on the job longer. Which means you can stock fewer spares, and replace fewer batteries. We've also extended our capacity warranty from 18 to 24 months*, while backing all IMPRES batteries with a long 48 month workmanship warranty. IMPRES 2 batteries are compatible with all existing IMPRES chargers, so your upgrade will be a smooth one.

*IMPRES 2 batteries not charged exclusively in IMPRES 2 chargers receive a 6 month capacity warranty reduction to 18 months instead of 24 months.



APX portable radio energy accessories

COMPATIBILITY	ACCESSORY		FEATURES								
MOTOROLA IMPRES 2 BATTERIES											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	CHEMISTRY	TYPICAL RATED CAPACITY (MAH)	DIMENSIONS (MILLIMETERS) (H X W X D)	WEIGHT (MAX.GRAMS)	HAZLOC-CAPABLE ¹	IP RATING	OPERATING TEMPERATURE
APX 8000 APX 7000 APX 7000XE APX 6000 APX 6000XE APX 5000 SRX 2200		IMPRES 2 Li-Ion 3400 mAh battery, IP68 rugged	PMNN4486	●	Li-Ion	3400	86 x 59 x 42	185		IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 2550 mAh battery, IP68 rugged	PMNN4485	●	Li-Ion	2550	86 x 59 x 37	150		IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 4850 mAh battery, IP68 rugged, -30°C rated	PMNN4487	●	Li-Ion	4850	130 x 59 x 42	320		IP68 rugged	-30°C to +60°C
		IMPRES 2 Li-Ion 5100 mAh battery, IP68 rugged	PMNN4494	●	Li-Ion	5100	130 x 59 x 42	320		IP68 rugged	-20°C to +60°C
APX 6000 APX 6000XE APX 5000 SRX 2200 APX 8000H APX 8000HXE		IMPRES 2 Li-Ion 3100 mAh battery, IP68 rugged	PMNN4547 ²	●	Li-Ion	3100	86 x 59 x 45	200	UL	IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 4600 mAh battery, IP68 rugged	PMNN4573 ²	●	Li-Ion	4600	130 x 59 x 42	320	UL	IP68 rugged	-20°C to +60°C
APX 8000 APX 8000XE		IMPRES 2 Li-Ion 3400 mAh battery, IP68 rugged	PMNN4504	●	Li-Ion	3400	86 x 59 x 42	185	UL	IP68 rugged	-20°C to +60°C
		IMPRES 2 Li-Ion 4850 mAh Battery, IP68 rugged, -30°C rated	PMNN4505	●	Li-Ion	4850	130 x 59 x 42	320	UL	IP68 rugged	-30°C to +60°C

¹ HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

² Require radio firmware R25.01.00 or greater otherwise the radio fuel gauge will be inaccurate; MTN-0222-21-NA.



APX portable radio energy accessories

COMPATIBILITY		ACCESSORY		FEATURES						
MOTOROLA IMPRES BATTERIES The only batteries developed, tested and certified for optimal performance with your APX radio. APX batteries are Proven Tough, in lab test after lab test, to withstand shocks, knocks, drops and shakes and outperform the other brands.										
PORTABLE RADIOS	DESCRIPTION	PART NUMBER	IMPRES	CHEMISTRY	TYPICAL RATED CAPACITY (MAH)	DIMENSIONS (MILLIMETERS) (H X W X D)	WEIGHT (MAX.GRAMS)	HAZLOC-CAPABLE†	IP RATING	OPERATING TEMPERATURE
APX 7000 APX 7000XE APX 6000 APX 6000XE APX 5000 SRX 2200	 APX clamshell battery pack IP57, requires 12 AA Alkaline or Lithium batteries (not included).	PMNN4439		AA Alkaline/ Lithium	*Alkaline: 2800 *Lithium: 5700	164 x 64 x 58	*Alkaline: 550 *Lithium: 450		IP57	
APX 6000 APX 6000XE APX 8000 APX 8000XE APX 8000H APX 8000HXE SRX 2200	 APX hazloc clamshell battery pack IP68, NIFC approved, requires 12 AA Alkaline or Lithium batteries (not included)	PMNN4891 ¹		AA Alkaline/ Lithium	*Alkaline: 2800 *Lithium: 5700	164 x 64 x 58	*Alkaline: 568 *Lithium: 458	UL	IP68	
SRX 2200	 Military, Li-Ion 3100 mAh, battery IP68 rugged, coyote brown	NNTN8182		Li-Ion	3100	86 x 59 x 42	185		IP68 Rugged	-20°C to +60° C
APX 4000 APX 3000 APX 2000 APX 1000 APX 1000i APX 900	 IMPRES Li-Ion 2000 mAh slim battery, IP67	NNTN8128	●	Li-Ion	2000	115 x 52 x 18	160		IP67	-20°C to +60° C
	 IMPRES Li-Ion 2800 mAh battery, IP68	PMNN4448	●	Li-Ion	2800	115 x 52 x 23	170		IP68	-10°C to +60° C
APX 1000i APX 900	 IMPRES Li-Ion 2900 mAh battery, IP68	PMNN4489	●	Li-Ion	2900	115 x 52 x 23	170	UL	IP68	-10°C to +60° C
	 IMPRES Li-Ion 2100 mAh battery, IP68	PMNN4491	●	Li-Ion	2100	115 x 52 x 18	160		IP68	-10°C to +60° C
	 IMPRES Li-Ion 3000 mAh battery, IP68	PMNN4493	●	Li-Ion	3000	115 x 52 x 23	170		IP68	-10°C to +60° C
APX 4000 APX 3000 APX 2000 APX 1000	 IMPRES Li-Ion 2500 mAh battery, IP68	NNTN8560	●	Li-Ion	2500	113 x 52 x 23	195	UL	IP68	-10°C to +60° C
APX 3000	 IMPRES Li-Ion 1300 mAh sim battery, IP67	NNTN8305	●	Li-Ion	1300	115 x 52 x 14	98		IP67	-10°C to +60° C

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

¹ Require radio firmware R36.01.00 or greater otherwise will result in Wrong Battery display on the radio.

* AA cell capacity and weight are for reference only. Refer to cell capacity and weight specification by cell manufacturer

Motorola Solutions recommends a calibration procedure be performed on an IMPRES 2 battery every 28 days to maintain best APX device fuel gauge accuracy and prevent missing battery icon.



APX portable radio charger accessories

COMPATIBILITY	ACCESSORY		FEATURES								
CHARGER SOLUTIONS Choose from a variety of solutions including single-unit, unique dual-unit, multi-unit, travel and vehicular chargers and be confident your radio is charged and ready to go the moment you need it.											
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	CHEMISTRY	POWER SOURCE	DIMENSIONS (MILLIMETERS) (H X W X D)	NUMBER OF POCKETS	RECONDITIONING CAPABLE	CHARGING CURRENT (MAX.)*	NUMBER OF DISPLAYS
SINGLE AND MULTI-UNIT CHARGERS											
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		IMPRES 2 single-unit fast charger, US/NA 115V	NNTN8860	●	Li-Ion, NiMH	115VAC	75 x 100 x 125	1	●	Fast	
		IMPRES 2 single-unit fast charger, 115V, TAA compliant	NNTN8860_TAA	●	Li-Ion, NiMH	115VAC	75 x 100 x 125	1	●	Fast	
		IMPRES 2 single-unit fast charger	NNTN8863- US/NA/LA, 115V NNTN8858 - EU, 240V NNTN8864 - EU PLUG, 240V NNTN8857 - BRZ, 240V NNTN8855 - ARG, 240V NNTN8856 - ANZ, 240V NNTN8865 - UK, 240V	●	Li-Ion, NiMH	100-240VAC	75 x 100 x 125	1	●	Fast	
APX 4000 APX 3000 APX 2000 APX 1000 APX 900		IMPRES single-unit charger, US/NA 115V	PMPN4576 - US/NA 115V PMPN4571 - ANZ, 240V PMPN4572 - UK, 240V PMPN4573 - ARG, 240V PMPN4575 - BRZ, 90 -260V PMPN4577 - EU, 240V	●	Li-Ion, NiMH	115VAC	51 x 88 x 94	1	●	Rapid rate	
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		IMPRES 2 multi-unit fast charger with 6 displays and 6 integrated USB charging ports	NNTN8844 - US/NA NNTN8844BTAA NNTN8839 - ANZ NNTN8841 -BRZ	●	Li-Ion, NiMH	100-240VAC	153 x 445 x 292	6	●	Fast	6
APX 4000 APX 3000 APX 2000 APX 1000 APX 900		IMPRES 2 multi-unit fast charger with 1 display	PMPN4284 - US/NA PMPN4293 - ANZ PMPN4290 - UK PMPN4291 - ARG PMPN4292 - BRZ PMPN4289 - EU	●	Li-Ion, NiMH	100-240 VAC	117 x 444 x 170	6	●	Rapid rate	1
		Pocket to use with IMPRES 2 multi-unit charger	AS000129A01								
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		Wall mount bracket for IMPRES multi-unit chargers NNTN8844	NLN7967								
APX 4000 APX 3000 APX 2000 APX 1000 APX 900		Wall mount bracket for PMPN4284 charger	BR000272A01								

*Fast = up to 3.0A rapid rate = up to 1.5A



APX portable radio charger accessories

COMPATIBILITY	ACCESSORY		FEATURES						
CHARGER SOLUTIONS Choose from a variety of solutions including single-unit, dual-unit, multi-unit, travel and vehicular chargers and be confident your radio is charged and ready to go the moment you need it.									
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	IMPRES	CHEMISTRY	POWER SOURCE	DIMENSIONS (MILLIMETERS) (H X W X D)	NUMBER OF POCKETS	CHARGING CURRENT (MAX.)
VEHICULAR, TRAVEL CHARGERS AND VEHICULAR ADAPTER									
APX 8000 APX 8000H APX 8000HXE APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		IMPRES single-unit rapid rate vehicular charger	NNTN7624		Li-Ion, NiMH	12VDC hardwire	82 x 97 x 200	1	Rapid rate
APX 4000 APX 3000 APX 2000 APX 1000 APX 900		IMPRES single-unit rapid rate vehicular charger	NNTN7616		Li-Ion, NiMH	12VDC hardwire	82 x 97 x 200	1	Rapid rate
APX 8000 APX 8000XE APX 8000H APX 8000HXE APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		Travel charger with voltage regulated vehicular charger adapter, custom charger base, mounting bracket, and coil cord	RLN6434		Li-Ion, NiMH	12VDC adapter	67 x 67 x 70	1	
APX 4000 APX 3000 APX 2000 APX 1000 APX 900		Travel charger with voltage regulated vehicular charger adapter, custom charger base, mounting bracket, and coil cord	NNTN8525		Li-Ion, NiMH	12VDC adapter	64 x 67 x 57	1	
APX 8000 APX 8000XE APX 6000 APX 6000XE SRX 2200		APX vehicular adapter includes fused power cable, 2 keys for the lock, screws for attaching vehicular adapter to the trunnion mounting bracket & quick start guide. Trunnion mounting bracket NTN8940 ordered separately.	NNTN8527		Li-Ion	12VDC hardwire	254 x 137 x 84	1	Rapid rate
		Trunnion mounting bracket	NTN8940						



APX portable radio accessories

COMPATIBILITY		ACCESSORY
CHARGER SOLUTIONS		
PORTABLE RADIOS	DESCRIPTION	PART NUMBER
IMPRES BATTERY MANAGEMENT TOOLS		
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200	 IMPRES Battery Fleet Management Software	https://www.motorolasolutions.com/en_us/products/two-way-radio-accessories/impres-battery-fleet-management.html
	 IMPRES Battery Fleet Management License Key (EID)	HKVN4036A (NA)
	 IMPRES 2 single unit charger reprogramming and Battery Fleet Management interface cable*	NNTN8870


*Only supported by NNTN8860, NNTN8860_TAA, NNTN8863

Battery fleet management

Battery Fleet Management mitigates efforts behind the complexity and costs related to battery and charger management, making it easier for you and your employees to work safely and efficiently. Ensure optimal fleet performance with an updated user interface, meant to ease management and analytics capabilities.



Scan QR code to view the IMPRES Battery Fleet Management brochure.

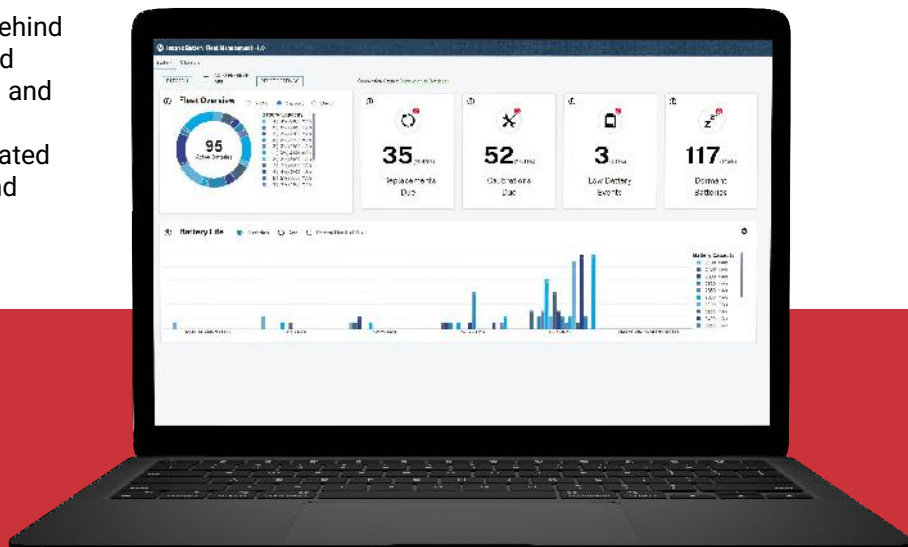

When the IMPRES Battery Fleet Management software collects critical data, it allows you to analyze key aspects of the battery, such as battery age, capacity, recondition history and manufacturing and service dates. This information is then compiled into an accessible, user-friendly layout, so you are able to efficiently understand your devices' data. No other manufacturer delivers this patented technology and comprehensive capabilities.

For details on the 3 BFM on-premise configurations and how to order the Entitlement ID, view the [Ordering and Deployment Guide](#). The IMPRES Battery Fleet Management Software is available to download from Motorola Solutions' internal [MyView](#) portal.



Carry solutions

Motorola Carry Solutions were developed to meet the demands of public safety and other users who operate in the most rigorous of environments. A variety of carrying accessories are available for comfort and convenience.



APX portable radio carry accessories

COMPATIBILITY	ACCESSORY			FEATURES				
CARRY SOLUTIONS Carry cases and holders are available in sizes to fit your radio and battery and permit audio to be heard clearly. Our carry accessories keep your hands free, so you can concentrate on the task at hand.								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	BELT LOOP/CLIP DIMENSION (INCHES)	SWIVEL / FIXED	D-RINGS	COMPATIBLE BATTERIES
APX 8000HXE		Carry holder for 2.5 and 3.5 model radios	PMLN7954	Plastic	2.5	Fixed		All
		Leather carry case with D-ring	PMLN7955	Hard leather		For use with fireman's radio strap	●	PMNN4745
APX 7000		Carry holder for 1.5, 2.5 and 3.5 model radios	PMLN5331	Plastic	3	Fixed		All
APX 7000XE		Carry holder for 1.5, 2.5 and 3.5 model radios	PMLN6102	Plastic	3	Fixed		All
APX 8000 APX 6000		Carry Holder for 1.5, 2.5 and 3.5 Model Radios	PMLN7901	Plastic	2.5	Fixed		All
APX 8000XE APX 6000XE		Carry holder for 1.5, 2.5 and 3.5 model radios	PMLN7902	Plastic	2.5	Fixed		All
APX 3000		Covert carry holster	PMLN6327	Plastic	3	Fixed		All
APX 7000		Leather carry case with 3 inch fixed belt loop	PMLN5323	Hard leather	3	Fixed	●	PMNN4485 PMNN4486
		Leather carry case with 3 inch fixed belt loop	PMLN5326	Hard leather	3	Fixed	●	NNTN7033 NNTN7034 NNTN8921 PMNN4487 PMNN4494
APX 8000 APX 7000 APX 6000 SRX 2200		Universal carry holster	PMLN7732	Plastic	2.5	Fixed		PMNN4486, PMNN4485 PMNN4487, PMNN4494 NNTN8930, NNTN8921 PMNN4504, PMNN4505 NNTN7036, NNTN7035 PMNN4439



Leather carry cases

Motorola Leather Carry Cases constructed of top-grain leather are designed to withstand the harsh conditions of public safety users.

APX portable radio carry accessories

COMPATIBILITY	ACCESSORY		FEATURES					
CARRY SOLUTIONS								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	BELT LOOP/CLIP DIMENSION (INCHES)	SWIVEL / FIXED	D-RINGS	COMPATIBLE BATTERIES
APX 7000		Leather carry case with D-rings and 2.75" swivel belt loop	PMLN5324	Hard leather	2.75	Swivel		NNTN7038 NNTN8092 NNTN8930 PMNN4485 PMNN4486
		Leather carry case with D-rings and 2.75" swivel belt loop	PMLN5327	Hard leather	2.75	Swivel		NNTN7033 NNTN7034
		Leather carry case with D-rings and 2.75" swivel belt loop	PMLN5330	Hard leather	2.75	Swivel		NNTN7035 NNTN7036 NNTN7037 NNTN7573
		Dual display radio flip leather carry case with 2.75" swivel belt loop	PMLN5560	Hard leather	2.75	Swivel		NNTN7038 NNTN8092
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE		Molded nylon carry case with quick disconnect swivel and adjustable lanyard	PMLN6802	Nylon		Swivel		All
APX 7000XE		Leather carry case with 3" fixed belt loop	NNTN8112	Hard leather	3	Fixed		NNTN7038 NNTN8092
		Leather carry case with 3" fixed belt loop	NNTN8114	Hard leather	3	Fixed		NNTN7033 NNTN7034
		Leather carry case with 3" fixed belt loop	NNTN8116	Hard leather	3	Fixed		NNTN7035 NNTN7036 NNTN7037 NNTN7573



APX portable radio carry accessories

COMPATIBILITY	ACCESSORY			FEATURES				
CARRY SOLUTIONS								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	BELT LOOP/CLIP DIMENSION (INCHES)	SWIVEL/FIXED	D-RINGS	COMPATIBLE BATTERIES
APX 7000XE		Leather carry case with 2.75" swivel belt loop	NNTN8111	Hard leather	2.75	Swivel		
		Leather carry case with D-Rings and 2.75" Swivel Belt Loop	NNTN8113	Hard leather	2.75	Swivel	●	NNTN7033 NNTN7034 PMNN4487 PMNN4494 NNTN8921
		Leather carry case with d-rings and 2.75" swivel belt loop	NNTN8115	Hard leather	2.75	Swivel	●	NNTN7035 NNTN7036 NNTN7037 NNTN7573
		Boston leather carry case with D-rings – requires an audio accessory, radio strap holds down radio by strapping over the audio accessory connector, used with boston leather radio straps	AY000222A01	Hard leather			●	
APX 8000 APX 6000		Leather carry case with 3" fixed belt loop	PMLN7903	Hard leather	3	Fixed	●	PMNN4485 PMNN4486 PMNN4547 NNTN8930 (for APX 6000)
		Leather carry case with 3" fixed belt loop	PMLN5660	Hard leather	3	Fixed	●	NNTN7033 NNTN7034 PMNN4487 PMNN4494 NNTN8921 (for APX 6000)
		Leather carry case with D-rings and 2.75" swivel belt loop	PMLN7904	Hard leather	2.75	Swivel	●	PMNN4485 PMNN4486 PMNN4547 NNTN8930 (for APX 6000)
		Leather carry case with D-rings and 2.75" swivel belt loop	PMLN5659	Hard leather	2.75	Swivel	●	NNTN7033 NNTN7034 PMNN4487 PMNN4494 NNTN8921 (for APX 6000)
APX 8000XE APX 6000XE		Leather carry case with 3" fixed belt loop	PMLN7905	Hard leather	3	Fixed	●	NNTN8092 PMNN4547 PMNN4485 (for APX 6000XE) PMNN4486 (for APX 6000XE) NNTN8930 (for APX 6000XE) PMNN4504 (for APX 8000XE)



APX portable radio carry accessories

COMPATIBILITY	ACCESSORY			FEATURES				
CARRY SOLUTIONS								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	BELT LOOP/CLIP DIMENSION (INCHES)	SWIVEL/FIXED	D-RINGS	COMPATIBLE BATTERIES
APX 8000XE APX 6000XE		Leather carry case with 3" fixed belt loop	PMLN5879	Hard leather	3	Fixed	●	NNTN7033 NNTN7034 PMNN4487 (for APX 6000XE) PMNN4494 (for APX 6000XE) NNTN8921 PMNN4573 (for APX 6000XE) PMNN4505 (for APX 8000XE)
		Leather carry case with D-Rings and 2.75" swivel belt loop	PMLN7906	Hard leather	2.75	Swivel	●	PMNN4547 PMNN4485 (for APX 6000XE) PMNN4486 (for APX 6000XE) NNTN8930 (for APX 6000XE) PMNN4504 (for APX 8000XE)
		Leather carry case with D-Rings and 2.75" swivel belt loop	PMLN5877	Hard leather	2.75	Swivel	●	NNTN7033 NNTN7034 PMNN4487 PMNN4573 (for APX 6000XE) PMNN4494 (for APX 6000XE) NNTN8921 (for APX 6000XE) PMNN4505 (for APX 8000XE)
APX 4000 APX 2000 APX 1000		Leather carry case with 2.75" swivel belt loop, for one-knob radios* (D-stud is on carry case)	PMLN6085	Hard leather	2.75	Swivel	●	
		Leather carry case with 2.75" swivel belt loop, for two-knob radios (D-stud is on belt loop)	PMLN7182	Hard leather	2.75	Swivel	●	
		Replacement swivel belt loop for PMLN7182	PMLN7229	Hard leather	2.75	Swivel		
SRX 2200		Nylon, coyote brown carry pouch designed to fit elite special ops "molle" vest (sold separately)	NNTN8269	Nylon	Up to 5	Fixed		
		Coyote brown carry case	RLN6253	Nylon	Up to 5	Fixed		
APX 7000		Nylon carry case with 3" fixed belt loop	PMLN5322	Nylon	3	Fixed	●	
		Nylon carry case with 3" fixed belt loop	PMLN5325	Nylon	3	Fixed	●	NNTN7033 NNTN7034
		Nylon carry case with 3" fixed belt loop	PMLN5328	Nylon	3	Fixed	●	NNTN7035 NNTN7036 NNTN7037 NNTN7573

*For APX4000 One Knob Radios only



APX portable radio carry accessories

COMPATIBILITY	ACCESSORY			FEATURES				
CARRY SOLUTIONS								
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	MATERIAL	BELT LOOP/CLIP DIMENSION (INCHES)	SWIVEL/FIXED	D-RINGS	COMPATIBLE BATTERIES
APX 900		Leather carry case with 3" fixed belt loop	PMLN5838	Hard Leather	3	Fixed		PMNN4424 PMNN4491 PMNN4493 PMNN4489 PMNN4448 NNTN8128
		Leather carry case with 2.5" swivel belt loop	PMLN5842	Hard Leather	2.5	Swivel		
		Leather carry case with 3" swivel belt loop	PMLN5840	Hard Leather	3	Swivel		
		Nylon carry case with 3" fixed belt loop	PMLN5844	Nylon	3	Fixed		
APX 7000 APX 7000XE APX 6000 APX 6000XE SRX 2200		Carry case for APX Radio with clamshell battery	PMLN6712	Nylon	Up to 5	Fixed		
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE		2.5" hard plastic belt clip (not compatible with APX 7000 UHF radios)	NTN8266	Plastic	2.5			
		3" hard plastic belt clip	HLN6875	Plastic	3			
		Universal chest pack with radio holder, pen holder and velcro secured pouch	HLN6602	Nylon				
		Break-a-way chest pack with radio holder, pen holder and velcro secured pouch	RLN4570	Nylon				
		Replacement strap for HLN6602 and RLN4570	1505596Z02	Nylon				
		Accessory connector dust cover	1575250H01					
	SRX 2200		Accessory connector dust cover	1575250H02				
APX 4000 APX 2000 APX 1000 APX 900		2" hard plastic belt clip	PMLN4651	Plastic				
		2.5" hard plastic belt clip	PMLN7008	Plastic				
		Accessory connector dust cover	15012157001					



APX portable radio carry accessories

COMPATIBILITY	ACCESSORY			FEATURES	
CARRY SOLUTIONS					
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	BELT LOOP/BELT DIMENSION (INCHES)	MATERIAL
APX 900		Replacement 2.5" leather swivel belt loop	PMLN5610	2.5"	Hard leather
		Replacement 3" leather swivel belt loop	PMLN5611	3"	Hard leather
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE		Replacement 2.5" leather swivel belt loop	PMLN5407	2.5"	Hard leather
		Replacement 2.75" leather swivel belt loop	PMLN5408	2.75"	Hard leather
		Replacement 3" leather swivel belt loop	PMLN5409	3"	Hard leather
APX 7000XE	Replacement carry case strap with snaps, long. used with NNTN8111, NNTN8112, NNTN8113, NNTN8114, NNTN8115 and NNTN8116		PMLN5800	3"	Leather
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 2000 SRX 2200		1.75" wide leather belt	4200865599	Up to 41"	Leather
		Adjustable nylon carrying strap	NTN5243	Up to 36"	Nylon
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 SRX 2200		Boston leather fireman's radio strap	RLN6486	Up to 62"	Leather
		Boston leather fireman's radio strap - XL	RLN6487	Up to 70"	Leather
		Boston leather fireman's radio strap with button back holder	AY000223A01	Up to 51"	Leather
		Boston leather fireman's radio strap with button back holder - XL	AY000229A01	Up to 54"	Leather
		Boston leather anti-sway strap for boston leather fireman's radio strap	RLN6488	Up to 9"	Leather



APX portable radio antenna accessories

COMPATIBILITY	ACCESSORY		FEATURES						
ANTENNAS									
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	UHF/VHF/ 700/800 MHz	FREQUENCY BAND (MHZ)	INTEGRATED GPS	LENGTH (CM)	TYPE	HAZLOC- CAPABLE†
APX 8000 APX 8000H APX 8000HXE APX 6000BN APX 4000 APX 2000		700/800 MHz, GPS whip antenna	PMAF4040	700/800	764-870		20.3	Whip	UL
APX 8000 APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE APX 4000 APX 3000 APX 2000 APX 1000 SRX 2200		700/800 MHz, GPS whip antenna	NAF5085	700/800	764-870		20.3	Whip	UL
		UHF, GPS whip antenna	PMAE4065	UHF	380-520		14.2	Whip	UL
APX 6000 APX 6000XE APX 4000 APX 2000 APX 3000 APX 1000 SRX 2200		VHF, GPS whip antenna	NAR6593	VHF	136-174		20	Whip	UL
APX 4000 APX 2000		900 MHz, GPS antenna	PMAF4008	800/900	896-941		18	Whip	
		800/900 MHz, GPS combination helical antenna	PMAF4003	800/900	806-941		18	Helical	UL
APX 6000 APX 6000XE APX 5000 APX 1000		1/4 Wave, 700/800 MHz, GPS stubby antenna	NAR6595	700/800	764-870		9.8	Stubby	UL
APX 8000 APX 8000XE APX 7000 APX 7000XE		VHF, UHF Dual Band, GPS whip antenna	PMAT4001	VHF UHF	136-174 380-520		21.8	Whip	UL
		UHF 700/800 MHz dual band, GPS whip antenna	PMAS4001	UHF 700/800	380-520 764-870		19.7	Whip	UL
APX8000XE APX8000HXE		All Band/GPS antenna	AN000342A01	VHF/UHF/700/ 800	136-174 380-520 762-870 1570-1610		20	Whip	UL

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX portable radio antenna accessories

COMPATIBILITY	ACCESSORY		FEATURES						
ANTENNAS									
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	UHF/VHF/ 700/800 MHZ	FREQUENCY BAND (MHZ)	INTEGRATED GPS	LENGTH (CM)	TYPE	HAZLOC- CAPABLE†
APX 900		UHF, flexible whip antenna	PMAE4022	UHF	403-470		16	Flexible whip	UL
		VHF, 136-147 MHz, stubby antenna	PMAD4093	VHF	136-147		11	Stubby	UL
		VHF, 147-160 MHz, Stubby antenna	PMAD4094	VHF	147-160		11	Stubby	UL
		VHF, 160-174 MHz, stubby antenna	PMAD4095	VHF	160-174		11	Stubby	UL
		700/800 MHz flexible whip antenna	NAF5080	700/800	764-870		6.5	Flexible whip	
		Coaxial flexible whip antenna, 896-941 MHz	NAF5088	900	896-941		7	Flexible whip	
		VHF, 136-174 MHz, flexible whip wideband antenna	PMAD4088	VHF	136-174		8.3	Flexible whip	UL
		700/800 MHz stubby antenna	PMAF4022	700/800	764-870		9	Stubby	
		UHF, 380-470 MHz, stubby antenna	PMAE4100	UHF	380-470		9	Stubby	UL
		UHF, 450-527 MHz, stubby antenna	PMAE4102	UHF	450-527		9	Stubby	UL
		UHF, 420-445Mhz, stubby antenna	PMAE4094	UHF	420-445		4.5	Stubby	

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.



APX portable radio accessories

COMPATIBILITY	ACCESSORY		FEATURES						
ANTENNAS									
PORTABLE RADIOS	DESCRIPTION		PART NUMBER	UHF/VHF/ 700/800 MHz	FREQUENCY BAND (MHz)	INTEGRATED GPS	LENGTH (cm)	TYPE	HAZLOC- CAPABLE†
APX 6000 APX 6000XE APX 4000 APX 2000 APX 1000		UHF range 1, GPS stubby antenna	FAF5259	UHF	380-470	•	9.3	Stubby	UL
		UHF range 2, GPS stubby antenna	FAF5260	UHF	470-520	•	9.3	Stubby	UL
APX 7000 (700/800 MHz only) APX 6000 (700/800 MHz only)		GPS antenna (directly connected to radio when a public safety microphone is in use)	NAG4000	700/800		•	7.9	Stubby	
		700/800 public safety microphone only stubby antenna	PMAF4002	700/800	764-870		9	Stubby	
APX 3000		Flexible antenna with one flexible antenna spacer, 700/800 MHz	PMAF4006	700/800	764-870	•	41	Flexible	
		Flexible antenna with three flexible antenna spacers, UHF	PMAE4080	UHF	308-470	•	77	Flexible	
		Flexible antenna with two flexible antenna spacers, VHF	PMAD4125	VHF	136-174	•	44	Flexible	
PROGRAMMING CABLES									
APX 8000XE APX 7000 APX 7000XE APX 6000 APX 6000XE (700/800 MHz only) APX 4000 APX 3000 APX 2000 APX 1000 APX 900 SRX 2200		Programming and test cable	PMKN4013						
		Programming cable (not compatible with APX 900)	PMKN4012						

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.





APX mobile radio accessories

Communicate safely and easily wherever you go

You count on your mobile radio to function clearly and easily so you can concentrate on the mission and communicate safely. Get the most out of your APX radio by extending its power and reliability with APX accessories. Every mobile microphone, speaker, alarm and control station accessory is best-in-class technology, designed and optimized specifically for your APX mobile. There's simply no substitute for APX accessories.



APX 8500

NA



APX 6500 Enhanced

NA



APX 4500

NA only



APX 1500

NA

For control head options, check with your Motorola Solutions representative. Not all APX radios are available in all regions.

Discontinued APX mobile radio models

APX 6500
AN
APX 7500





Long range wireless remote speaker microphone (RSM)

The Long Range Wireless Remote Speaker Microphone (RSM) pairs instantly with touch pairing to the mobile microphone with Bluetooth gateway. The Long Range Wireless RSM works up to 100 meters away line-of-sight from the mobile radio, keeping you in communication where you never thought possible. Plug and play – Just attach the mobile gateway microphone to your radio, align the two devices where indicated by the blue dot and you are ready to go. Voice prompts will walk you through pairing quickly.



APX mobile radio accessories

COMPATIBILITY		ACCESSORY	
LONG RANGE WIRELESS get ready in seconds without having to worry about the wires getting in the way. No more getting tangled with your seatbelt. Work, safer, smarter and more comfortable in demanding environments.			
MOBILE RADIOS	DESCRIPTION		PART NUMBER
APX 8500 APX 7500 APX 5500 APX 6500 APX 4500 APX 1500		Long range wireless mobile accessory kit, includes wireless remote speaker microphone (RLN6544), mobile microphone bluetooth gateway (PMMN4097), vehicular charger (PMLN6716)	RLN6551
		Long range wireless mobile accessory kit (no power charger), includes wireless remote speaker microphone (RLN6544), mobile microphone bluetooth gateway (PMMN4097), Charger must be purchased separately	RLN6552
WIRELESS RSM (WRSM) ACCESSORIES AND REPLACEMENT PARTS			
WRSM		Dual Unit Charger, Rapid Rate Charger, 120V	PMLN7120
		Vehicular charger	PMLN6716
		Wireless RSM with battery and clip	RLN6544
		Mobile microphone with bluetooth gateway	PMMN4097
		Wireless RSM battery, 1800 mAh Li-Ion	PMNN4461
		D-ring swivel clip (12 pack)	NNTN4990
		Receive-only earpiece with comfort eartube, UL approved†	RLN4941
		Receive-only earpiece with comfort eartube	PMLN7560
		Receive-only earbud, UL approved	AARLN4885
		EP7 sonic defender, use with RLN4941	RLN6511 RLN6512 RLN6513

† HazLoc Details: For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.





IMPRES audio accessories

Mission critical voice transmissions have to be heard over engine, siren, road and wind noise. Fortunately, Motorola's exclusive IMPRES audio accessories are designed to optimize its output based on the accessory in use. IMPRES Visor Microphones are able to pick up and transmit the user's voice consistently to the receiving user regardless of how close they are speaking into the microphone.

APX mobile radio accessories

COMPATIBILITY	ACCESSORY		FEATURES	
MICROPHONES Access critical features directly on the Keypad microphone. Navigational buttons and a full keypad allow users to navigate radio menus, dial phone numbers and send text messages. Three programmable buttons are available for additional customization.				
MOBILE RADIOS	DESCRIPTION	PART NUMBER	MICROPHONE STYLE	IMPRES
APX 8500 APX 7500 APX 6500 APX 5500	 Water resistant palm microphone for motorcycle mounted mobiles	HMN1079	Standard	
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500	 Keypad microphone	HMN4079	Keypad + Navigation	
	 Standard palm microphone	HMN1090	Standard	
	 Water resistant palm microphone	HMN1089	Standard	
	 Telephone keypad handset with hang-up cup	HMN4097	Telephone + Keypad	
	 IMPRES™ telephone-style handset	HMN4098	Telephone	
	 Desktop microphone	RMN5070	Desktop	
	 IMPRES visor microphone, requires PTT switch GLN7278 or RLN5926	RMN5054	Visor	



APX mobile radio accessories

COMPATIBILITY	ACCESSORY	
MOBILE MICROPHONE ACCESSORIES		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500 APX 7500 APX 6500 APX 4500 APX 1500		Microphone hang-up clip HLN5391
		Microphone extension cable, 2-Feet. Not compatible with HMN4097 handset or HMN4079 keypad PMKN4093
		Microphone extension cable, 10-Feet. Not compatible with HMN4097 handset or HMN4079 keypad PMKN4033
		Microphone extension cable, 20-Feet. Not compatible with HMN4097 handset or HMN4079 keypad PMKN4034
		Emergency push button, can be used with the visor microphone HLN5131
		Emergency footswitch, can be used with the visor microphone HLN5113
		Footswitch push-to-talk, can be used with the visor microphone GLN7278
		Push button push-to-talk, can be used with the visor microphone RLN5926
		Replacement cable for HMN4079 PMKN4309
	Rear KPM cable - Y junction cable (for 02/05/07) 30009487001	
	Rear KPM cable - straight (for E5) 30009487002	
CONTROL STATION ACCESSORIES		
APX 7500 APX 6500 APX 4500 APX 1500		Power supply for APX mid power mobile radios (not compatible with enhanced _BN versions) HPN4007
		110V line cord, replacement cable for HPN4007 3060665A04
APX 8500 APX 6500 APX 4500 APX 1500		Desktop tray with speaker with bracket HLN7042

* Not for use with mobile radios with model numbers ending in "AN"

**Item is discontinued but shall remain orderable while supplies last




APX mobile radio accessories

COMPATIBILITY	ACCESSORY	
INSTALLATION AND MOUNTING ACCESSORIES Mount your radio in your vehicle without compromising safety. Trunnion kits give you the flexibility to mount the radio under your dash, in your dash, between the seats or on the floor. Remote mount kits allow the radio to be mounted in the trunk when dash space is limited.		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500 APX 7500 APX 6500* APX 4500 APX 1500	 High power trunnion kit; quick release with lock	HLN7003
	 Remote mount control head trunnion compatible with O2, O5, E5 and O7 control heads	HKN6186
	Dual radio trunnion kit To be used with APX 8500 MP, APX 6500 and APX 6500 enhanced	HLN7045
	Mid power trunnion kit; standard installation	HLN7002
APX 6500** APX 4500 APX 1500	Mid power trunnion kit	HLN6861

* Only original model mobile radios
 ** Only enhanced model mobile radios

COMPATIBILITY	ACCESSORY	
EXTERNAL ALARM ACCESSORIES External alarm accessories enable additional switching power when external accessories are attached.		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500 APX 7500 APX 6500 APX 4500 APX 1500	 External alarm relays	HLN6969

COMPATIBILITY	ACCESSORY	
UNIVERSAL RELAY CONTROLLER		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500 APX 7500 APX 6500 APX 4500 APX 1500	 Universal relay controller for o9 control head, 10 DC outputs, 15 amps per channel	PMUN1046
	Universal relay controller to transceiver cable	3064153H05

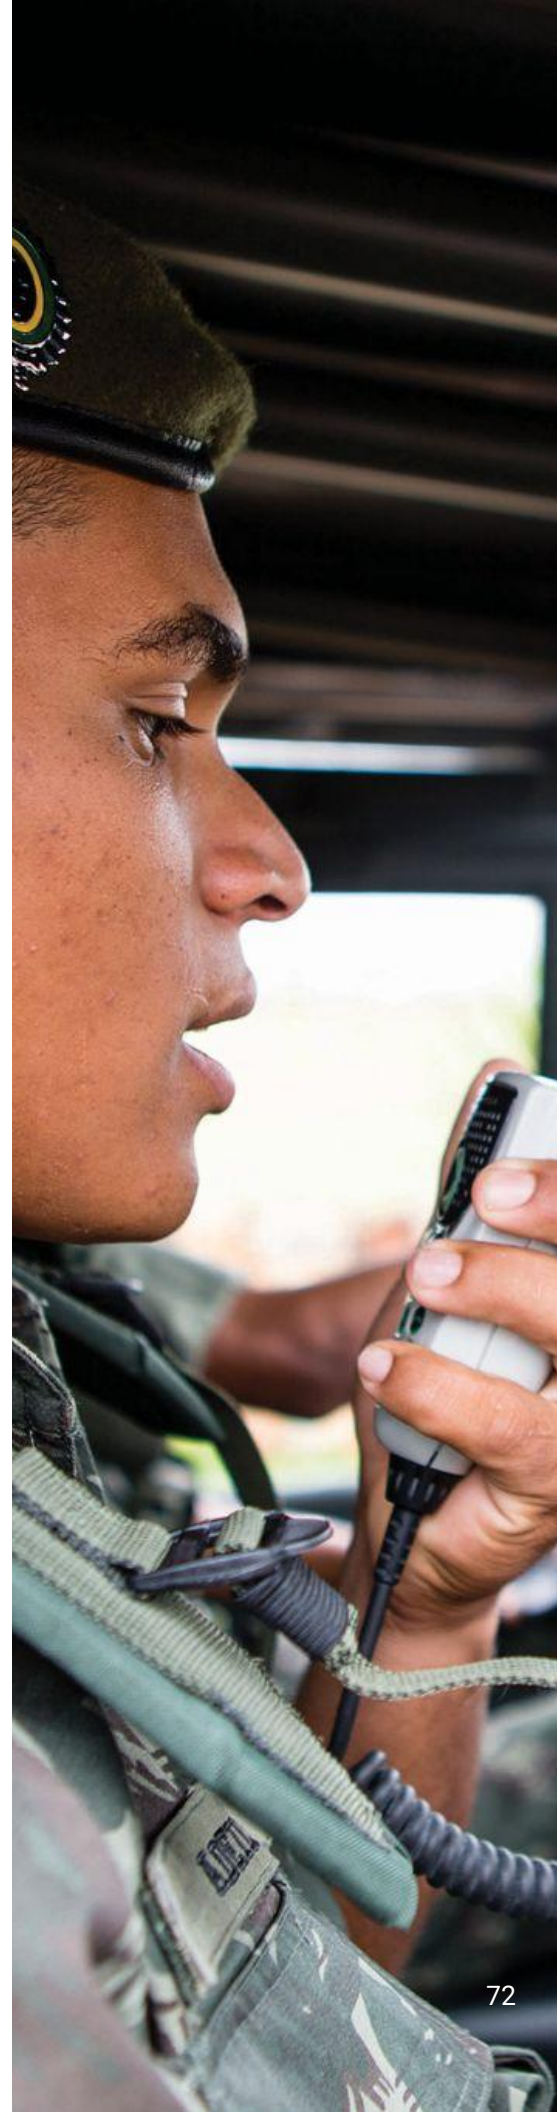

APX mobile radio accessories

COMPATIBILITY	ACCESSORY	
SPEAKERS Boost audio at your control station on your desk or in your vehicle with external speakers.		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500	 Remote mount, water resistant speaker, 7.5 watt rated audio	HSN4038
	 Remote mount, IPX4 speaker, 15 watt rated audio	HSN4040
	 7.5W external speaker	HSN4031
	 Non-water resistant speaker, 13 watt rated audio	HSN4032
	Covert 10 watt rated audio speaker	HSN4042
	 Siren speaker, under hood with grey finish	TDN6253*


*Item is discontinued but shall remain orderable while supplies last

COMPATIBILITY		ACCESSORY	
SIREN ACCESSORIES			
MOBILE RADIOS		DESCRIPTION	PART NUMBER
APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		Siren switchbox	HLN6819
		Siren cable, o5 siren to switchbox	HKH4363



APX mobile radio cable accessories

COMPATIBILITY		ACCESSORY	
CABLES			
MOBILE RADIOS		DESCRIPTION	PART NUMBER
CONTROL HEAD CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		O3 handheld control head extension cable, 17-feet	PMLN4958
		O3 handheld control head accessory cable	PMLN4959
		Control head cable with connections for power, speaker and headset jack	HKN6187
		Control head cable with connections for power and speaker	HKN6188
REMOTE MOUNT CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		Remote mount cable, 131-feet	HKN6164
		Remote mount cable, 115-feet	HKN6165
		Remote mount cable, 75-feet	HKN6166
		Remote mount cable, 50-feet	HKN6167
		Remote mount cable, 30-feet	HKN6168
		Remote mount cable, 17-feet	HKN6169
		Remote mount cable, 10-feet	HKN6170
APX 8500 APX 7500 APX 6500 APX 5500		Cable, remote control head vehicular interface port connector for O5 control head	HKN6196
		Motorcycle remote cable for O5 control head	3075217A02
KEYLOAD CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		Keyloader cable, KVL3000 and KVL4000	TKN8531
		Keyload adapter for mobile microphone port	HKN6182

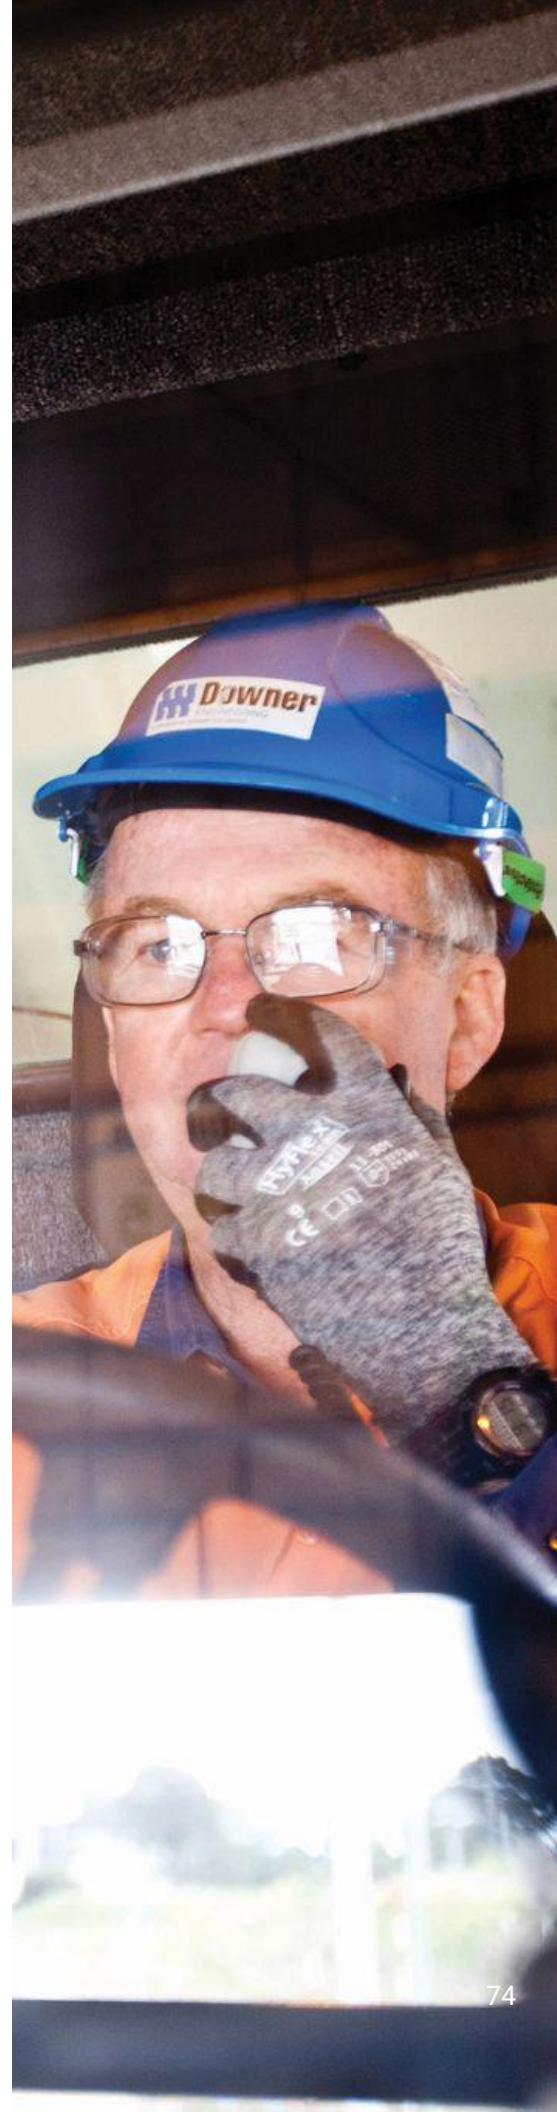

APX mobile radio cable accessories

COMPATIBILITY	ACCESSORY		
CABLES			
MOBILE RADIOS	DESCRIPTION		PART NUMBER
POWER CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		Mid power, dash mount power cable, 10-feet	HKN4191
		Mid power, remote mount power cable, 20-feet	HKN4192
		Mid power, rear ignition cable, dash mount	HLN6863
		High power, remote mount power cable 20-feet	HKN6110
		Motorcycle power cable	HKN6032
DATA CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500	Data tethering cable, required to connect to VML or certified data modem		KT000252A01
APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		RS232 cable for rear accessory port, dash mount only, 6-feet	HKN6160
		RS232 cable for rear accessory port, remote mount only, 20-feet	HKN6161
		RS232 cable for mobile microphone port	HKN6183
		RS232 cable for j600 transceiver interconnect board, 22-feet	HKN6122
PROGRAMMING CABLES			
APX 8500 APX 7500 APX 6500 APX 5500 APX 4500 APX 1500		USB cable, rear accessory port, remote mount, 15-feet (for use with customer program software)	TKN8531
		USB cable, rear accessory port, dash mount, 6-feet (for use with customer program software)	HKN6184
APX 8500 APX 7500 APX 6500 APX 5500		Programming cable	HKN6184



Antennas

For optimum range and quality, it is important to match the mobile radio's frequency with the proper Motorola antenna. These are available as standard 1/4 wave models or can include 3dB, 3.5dB or 5dB signal gain.



APX mobile radio antenna accessories

COMPATIBILITY		ACCESSORY		FEATURES		
ANTENNAS						
MOBILE RADIOS	DESCRIPTION		PART NUMBER	UHF / VHF / 800/900 MHz	FREQUENCY BAND (MHZ)	MOUNTING STYLE
APX 8500 MOTORCYCLE ANTENNAS						
APX 8500	All band mobile antenna		AN000131A01*		2.75	Through-hole
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 136-144 MHz, no tuning required		AN000197A01	VHF	136-144	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 144-150.8 MHz, no tuning required		AN000197A02	VHF	144-150.8	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 150.8-162 MHz, no tuning required		AN000197A03	VHF	150.8-162	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 162-174 MHz, no tuning required		AN000197A04	VHF	162-174	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 380-433 MHz, no tuning required		AN000197A05	UHF	380-433	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 425-470 MHz, no tuning required		AN000197A06	UHF	425-470	Motorcycle
	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 450-482 MHz, no tuning required		AN000197A07	UHF	450-482	Motorcycle


*Item is discontinued but shall remain orderable while supplies last



APX mobile radio accessories

COMPATIBILITY		ACCESSORY		FEATURES		
ANTENNAS						
MOBILE RADIOS	DESCRIPTION	PART NUMBER	UHF / VHF / 800/900 MHz	FREQUENCY BAND (MHZ)	MOUNTING STYLE	
APX 8500 MOTORCYCLE ANTENNAS						
APX 8500	Motorcycle mount, 1/4 wave whip antenna with QMA connector, 482-520 MHz, no tuning required	AN000197A08	UHF	482-520	Motorcycle	
	Motorcycle mount, low profile, unity gain antenna with QMA connector, 450-512 MHz, no tuning required	AN000197A09	UHF	450-512	Motorcycle	
	Motorcycle mount antenna with QMA connector, 3dB gain, 762-870 MHz	AN000197A10	800/900	762-870	Motorcycle	
	Motorcycle mount, low profile antenna with QMA connector, 3dB gain, 762-870 MHz	AN000197A11	800/900	762-870	Motorcycle	

COMPATIBILITY	ACCESSORY	
APX 8500 ANTENNA MULTIPLEXERS AND ADAPTERS		
MOBILE RADIOS	DESCRIPTION	PART NUMBER
APX 8500	Vehicle Multiplexer (supports HP)	EQ000103A02
	Motorcycle Multiplexer (low power)	EQ000103A01

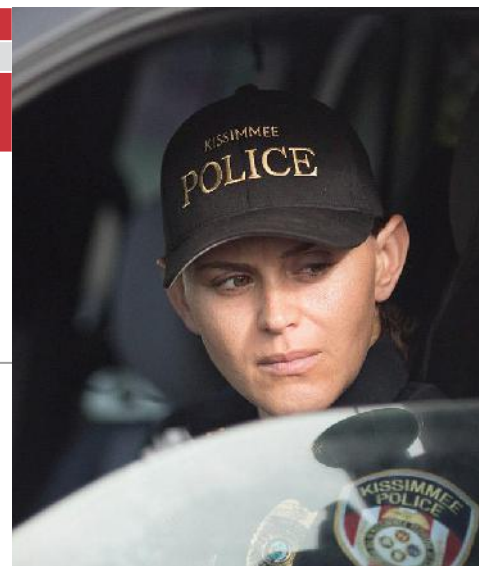

APX mobile radio antenna accessories

COMPATIBILITY	ACCESSORY	FEATURES				
ANTENNAS						
MOBILE RADIOS	DESCRIPTION	PART NUMBER	UHF / VHF / 800/900 MHz	FREQUENCY BAND (MHZ)	MOUNTING STYLE	
VHF ANTENNAS (RF ONLY)						
APX 8500* APX 7500 APX 6500 APX 4500 APX 1500		VHF 1/4 Wave Antenna, 136-144 MHz	HAD4006	VHF	136-144	Through-hole
		VHF 1/4 Wave Antenna, 144-150.8 MHz	HAD4007	VHF	144-150.8	Through-hole
		VHF 1/4 Wave Antenna, 150.8-162 MHz	HAD4008	VHF	150.8-162	Through-hole
		VHF 1/4 Wave Antenna, 162-174 MHz	HAD4009	VHF	162-174	Through-hole
		VHF 1/4 Wave Antenna, 146-174 MHz	HAD4017	VHF	146-174	Through-hole
		VHF Wideband Antenna, 136-174 MHz	HAD4021	VHF	136-174	Through-hole
		VHF Wideband Antenna 3.0 dB Gain, 136-174 MHz	HAD4022	VHF	136-174	Through-hole
		UHF ANTENNAS (RF ONLY)				
	APX 8500* APX 7500 APX 6500 APX 4500 APX 1500		UHF 1/4 Wave Antenna, 380-433 MHz	HAE6012	UHF	380-433
UHF 1/4 Wave Antenna, 450-470 MHz			HAE4003	UHF	450-470	Through-hole
UHF 1/4 Wave Antenna, 470-512 MHz			HAE4004	UHF	470-512	Through-hole

*CB000091A03 - Mini-U to QMA adapter required for APX 8500 to antenna connection.




APX mobile radio antenna accessories

COMPATIBILITY	ACCESSORY		FEATURES			
ANTENNAS						
MOBILE RADIOS	DESCRIPTION	PART NUMBER	UHF / VHF / 800/900 MHz	FREQUENCY BAND (MHZ)	MOUNTING STYLE	
VHF ANTENNAS (RF ONLY)						
APX 8500* APX 7500 APX 6500 APX 4500 APX 1500		UHF 3 dB gain antenna, 494-512 MHz	HAE4013†	UHF	494-512	Through-hole
		UHF 3.5 dB gain antenna, 380-420 MHz MAXRAD	HAE6010	UHF	380-420	Through-hole
		UHF 5 dB gain antenna, 380-420 MHz MAXRAD	HAE6011	UHF	380-420	Through-hole
		UHF 5 dB gain antenna, 494-512 MHz	RAE4016	UHF	494-512	Through-hole
		UHF 2 dB gain wideband antenna, 380-470 MHz, MAXRAD	HAE6013	UHF	380-470	Through-hole
		UHF 2 dB gain wideband antenna, 380-520 MHz	HAE6031	UHF	380-520	Through-hole
	UHF wideband low profile antenna, 450-512 MHz	HAE6016	UHF	450-512	Through-hole	

*CB000091A03 - Mini-U to QMA adapter required for APX 8500 to antenna connection.
 †Item is discontinued but shall remain orderable while supplies last.



APX mobile radio antenna accessories

COMPATIBILITY	ACCESSORY		FEATURES		
ANTENNAS					
MOBILE RADIOS	DESCRIPTION	PART NUMBER	UHF / VHF / 800/900 MHz	FREQUENCY BAND (MHZ)	MOUNTING STYLE
700/800 MHZ ANTENNAS (RF ONLY)					
APX 8500* APX 7500 APX 6500 APX 4500 APX 1500	 1/4 wave antenna, 762-870 MHz	HAF4016	700/800	762-870	Through-hole
	 3 dB gain low profile antenna, 762-870 MHz	HAF4013	700/800	762-870	Through-hole
	 3 dB gain elevated feed antenna, 762-870 MHz	HAF4014	700/800	762-870	Through-hole
	 3 dB gain collinear antenna, 762-870 MHz	HAF4017	700/800	762-870	Through-hole
ALL BAND ANTENNAS (RF ONLY)					
APX 8500	 Whip, all-band flexible antenna	AN000131A02	All band	136-174 380-520 760/870	(Through hole)
		AN000131A03	All band	136-174 380-520 760/870	(Replacement whip)

*CB000091A03 - Mini-U to QMA adapter required for APX 8500 to antenna connection.



APX mobile radio antenna accessories

COMPATIBILITY	ACCESSORY		FEATURES		
ANTENNAS					
MOBILE RADIOS	DESCRIPTION	PART NUMBER	GPS / WiFi	FREQUENCY BAND (MHZ)	MOUNTING STYLE
VHF ANTENNAS (RF ONLY)					
APX 7500 APX 6500 APX 4500 APX 1500	 GPS roof mount antenna SMA male connector with RG-174 17ft cable	HAG4000	GPS only		Roof mount
	 GPS glass mount antenna SMA male connector with RG-174 17ft cable	PMAN4001	GPS only		Glass mount
APX 8500* APX 7500 APX 6500 APX 4500 APX 1500	Convert glass-mount motorcycle antenna with Wi-Fi 5GHz	PMAN5101	Wi-Fi BT (bluetooth)		Glass mount
	Convert glass-mount motorcycle antenna with GPS GNSS	PMAN4109	GPS only		Glass mount
	Wi-Fi/GPS combination vehicle antenna	AN000163A01	GPS Wi-Fi BT (bluetooth)		Through-hole
	Wi-Fi/GPS combination vehicle antenna	AN000163A02	GPS Wi-Fi BT (bluetooth)		Motorcycle

*CB000091A03 - Mini-U to QMA adapter required for APX 8500 to antenna connection.





Glossary

Hazloc-capable

For more information on which accessories are approved by Underwriters' Laboratory (UL) with certain APX models, please consult the manual provided with each UL-approved APX portable.

Motorola-approved accessories are a critical part of the overall radio system intrinsic safety certification. Non-Motorola approved accessories may not be certified for APX and if used, could result in equipment that is NOT approved and unsafe in a hazardous environment.

RADIOS	UL ACCESSORIES MANUAL
APX N30/APX N50	PMLN8418
APX N70/APX N70 XE	PMLN8420
APX8000/8000XE	PMLN7769
APX900	PMLN7685
APX 2000/APX 4000/APX 1000/APX2000R/ APX 4000R	PMLN7812
SRX 2200/APX 6000/APX 6000XE/ APX 6000Li/APX 7000/APX 7000XE	PMLN7770
APX8000H / APX8000HXE	PMLN7894
APX NEXT, XE, and International	PMLN7985
APX NEXT XN	PMLN8382A



For more details scan the QR code or visit:

<https://learning.motorolasolutions.com>

IP rating

Ingress Protection (IP) is a global standard for rating dust and water protection. The first digit IP5x or IP6x represents increased levels of dust protection. The second digit, IPx7 or IPx8 represents increased levels of water protection.

IPx7 represents withstanding submersion in 1 meter of fresh water for 30 minutes.

IPx8 represents heating accessory to 27°C higher than the water temperature for 2 hours then immediately immersing it to a depth of 1 meter for another 2 hours.

IPx8+Rugged represents exceeding industry specs by heating accessory to 27°C higher than the water temperature for 2 hours then immediately immersing it to a depth of 2 meters for another 4 hours.

Note: Ingress Protection (IP) rating at system level is following the lowest IP rating of all devices connected.

Microphone noise suppression

Multi Mic Noise Suppression: Five integrated microphones and Adaptive Audio Engine automatically change the level of noise suppression, microphone gain, Windporting and speaker equalization to produce clear and loud audio in any environment.

Dual Mic Noise Suppression: Dual-microphone design tracks your voice so that you can keep your eye on what's in front of you while speaking. A digital signal processor (DSP) algorithm helps suppress background noise so you can be heard clearly regardless of the noise around you.

Windporting (Motorola Exclusive): Windporting reduces the effect of wind and other outdoor noises on your microphone performance and prevents water from clogging the microphone and distorting your transmission.

Noise-cancelling microphones negate crowd or machinery noise so your voice comes through loud and clear anytime you speak directly into the microphone.

Swivel or fixed loop

Secure to a belt loop and the case swings freely from side to side. The swivel latch system also allows the radio and case to be removed from the belt loop by simply inverting, lifting it up and out of the belt loop. Fixed loops provide a sturdy attachment to your belt.

Accessory software

To update your Mission Critical/Operation Critical Bluetooth® accessories, visit the [Accessory Software website](#).





For more information on Motorola Solutions mission-critical accessories,
Visit motorolasolutions.com/apx



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2025 Motorola Solutions, Inc. All rights reserved. 01-2026 [JM01]